SYNCO AUDIO App
User Guide

19:34
5G
My Device
Group ID: 700BCDDB
Xtalk Master
Device Code: 2400E3
17%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Direction Team)
B3(Camera Movement Department)
Group Management
1-on-1 Chat
Talk to All (Hold)
XStation
SYNCO
Xtalk Master

1.Open SYNCO AUDIO App

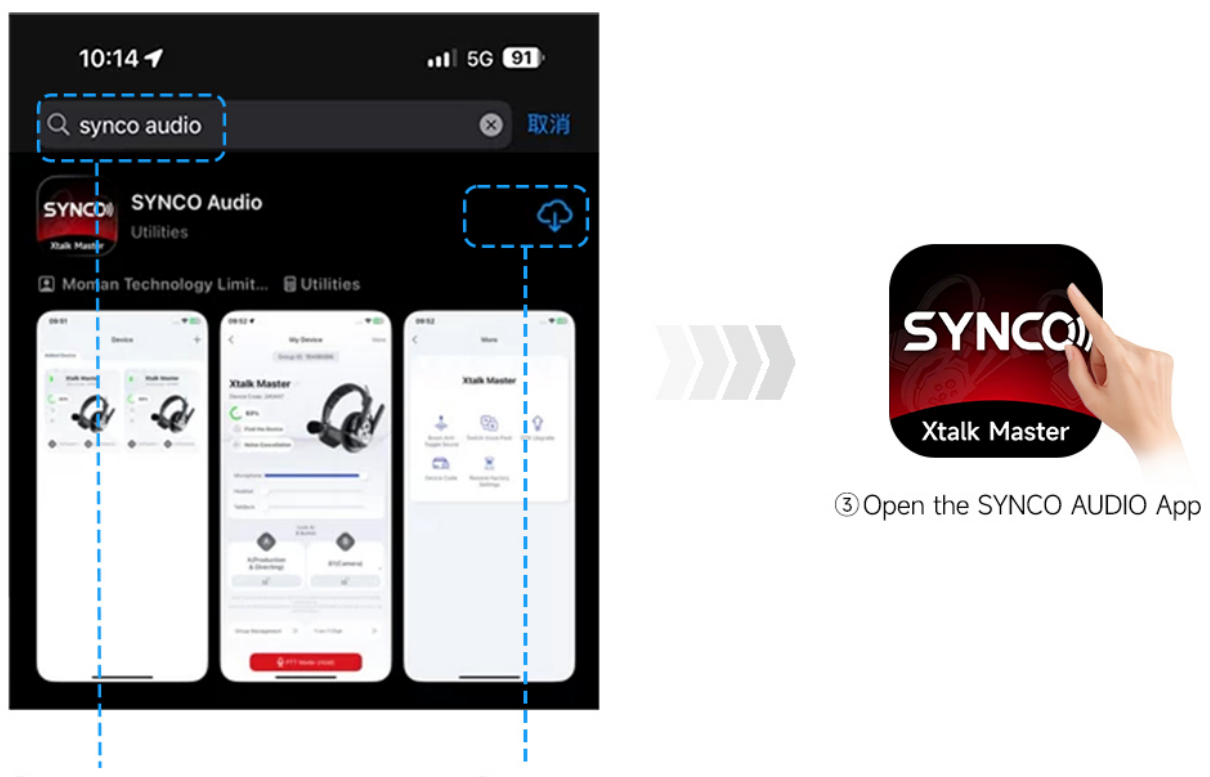
10:14
5G 91
synco audio
取消
SYNCO Audio
Utilities
Moman Technology Limit...
Utilities
SYNCO
Xtalk Master

① Search SYNCO AUDIO App
in the App Store/Google Play

② Download

③Open the SYNCO AUDIO App

Xtalk Master

World's 1st Full Duplex Wireless Intercom
System with Mesh Talk™

1.Power On the Headset

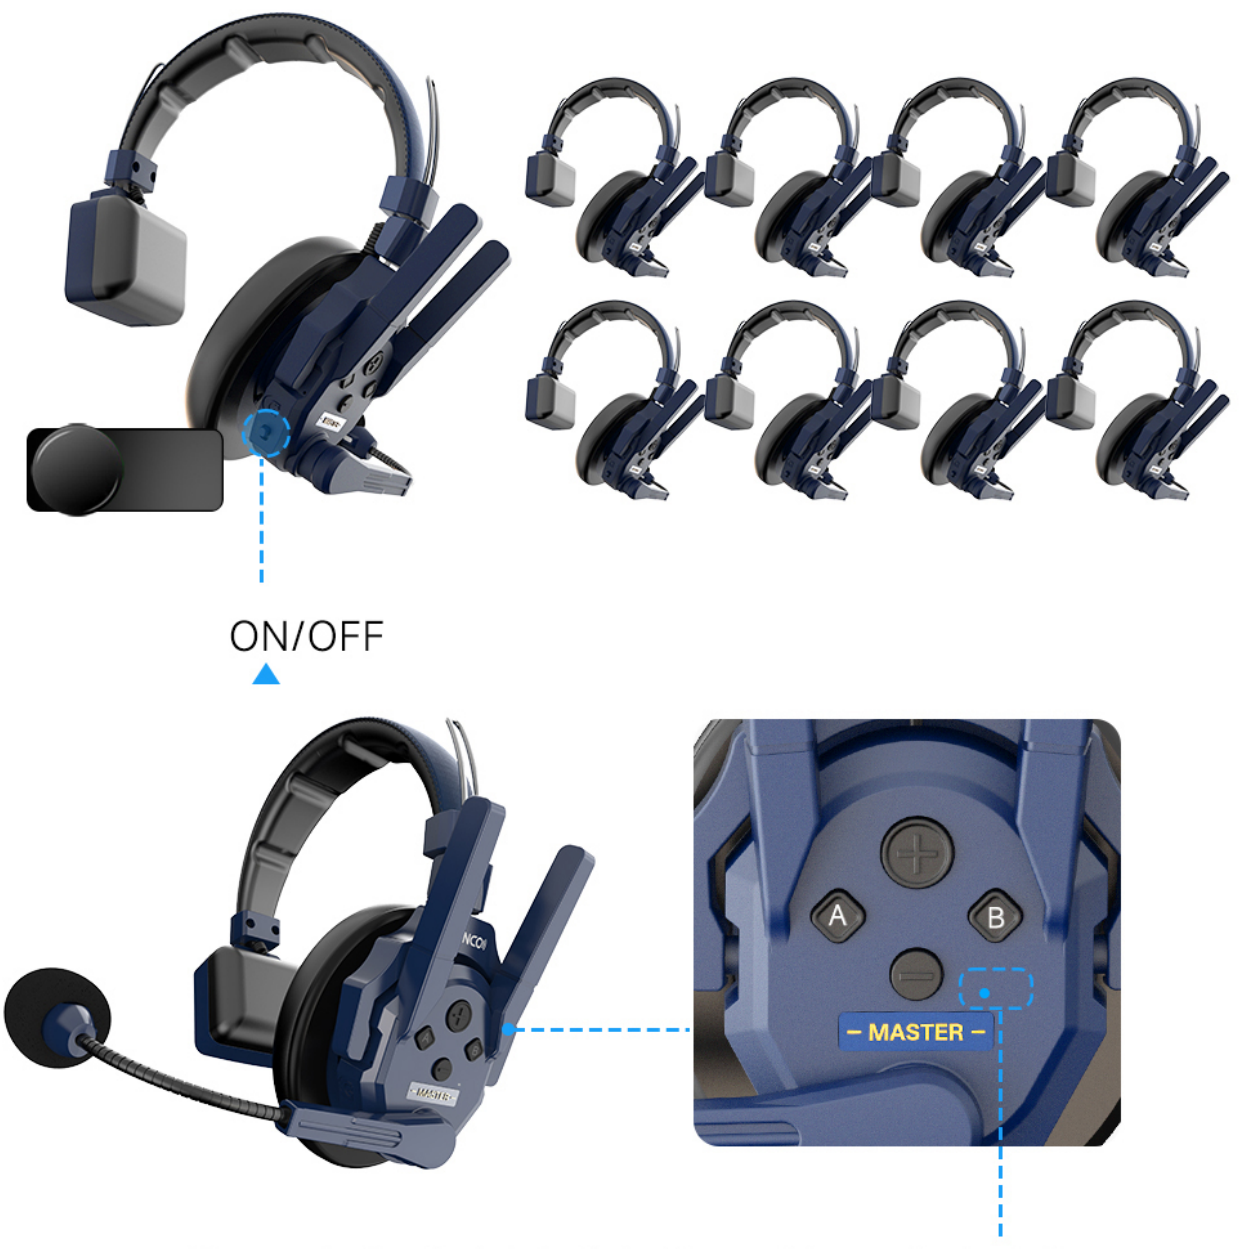
ON/OFF
A
B
– MASTER –

After powering it on, the indicator flashes blue ●, which means the headset is in App connecting mode. Please pair the headset with the App in 5 minutes.

2.Add/Find/Name/Remove the Device

Add the Device

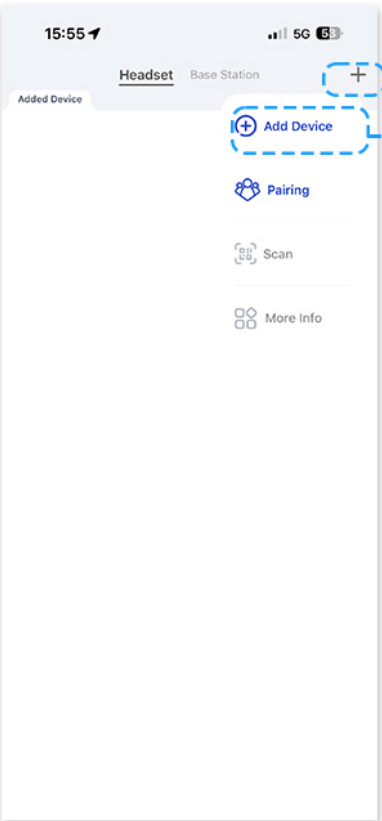
15:55
Headset
Base Station
+
Added Device
Add Device
Pairing
Scan
More Info

① Tap +

② Tap Add Device

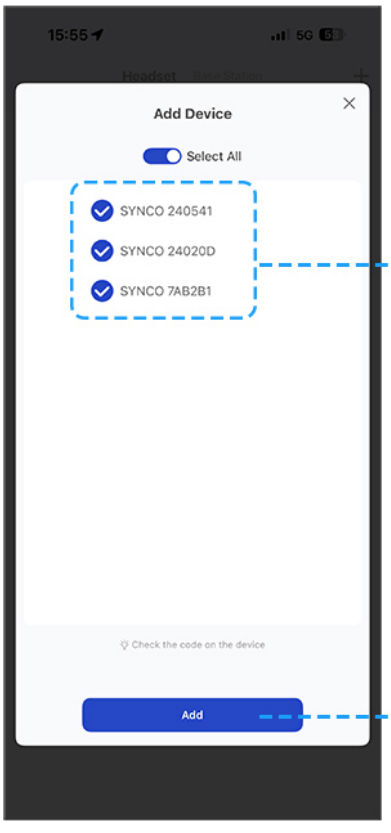
Add Device
Select All
SYNCO 240541
SYNCO 24020D
SYNCO 7AB2B1
Check the code on the device
Add

③ Select the headset

④ Tap Add

After adding the device, you can identify it using the Find Device feature

Find the Device

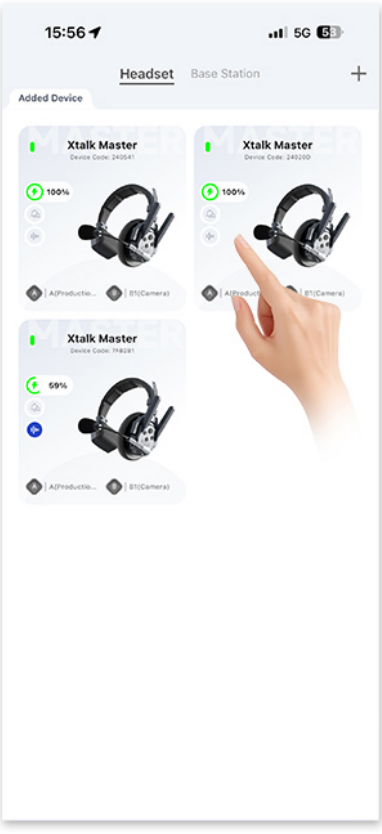
15:56
Headset
Base Station
Added Device
Xtalk Master
Xtalk Master
Xtalk Master
100%
100%
59%

①Tap the headset option box

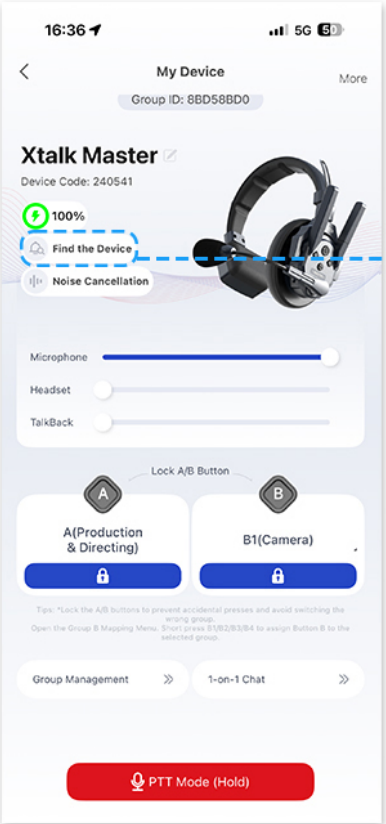
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Tap Find Device





The device will beep 🔊 and the indicator will flash.

Name the Device

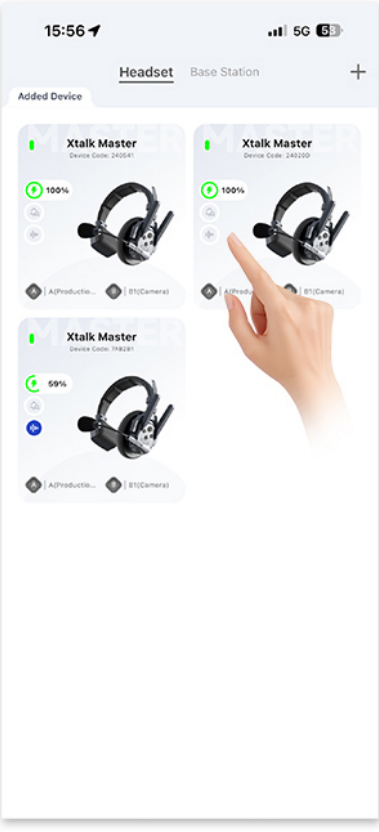
15:56
Headset
Base Station
Added Device
Xtalk Master
Xtalk Master
Xtalk Master

①Tap the headset option box

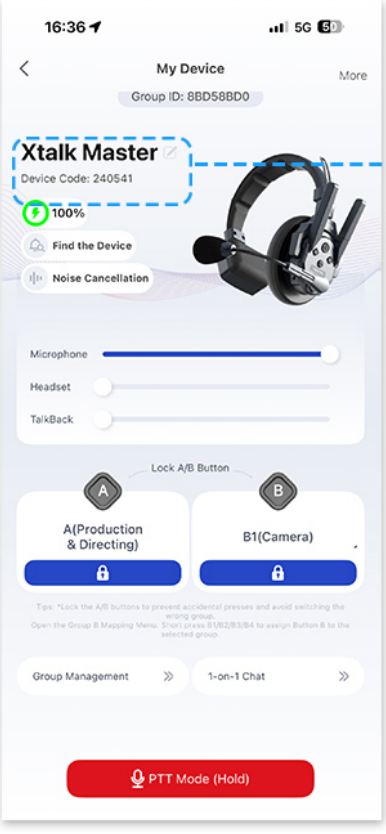
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Tap Device Name

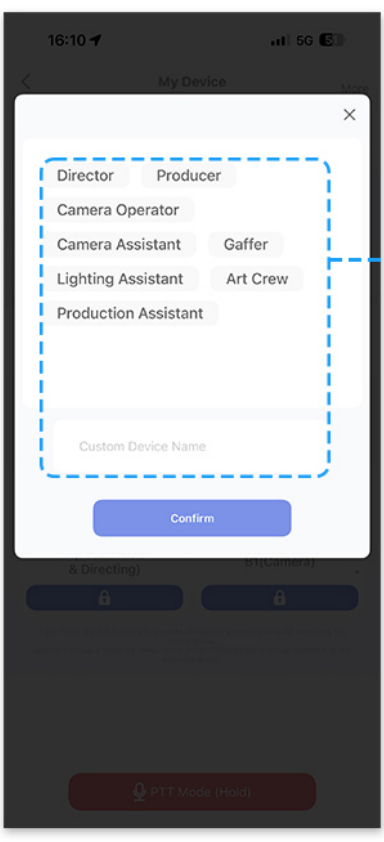
16:10
Director
Producer
Camera Operator
Camera Assistant
Gaffer
Lighting Assistant
Art Crew
Production Assistant
Custom Device Name
Confirm

③ Select or enter the device name

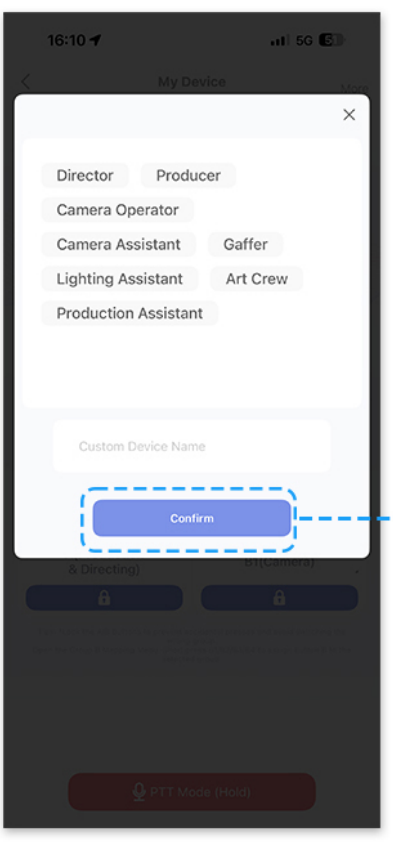
16:10
Director
Producer
Camera Operator
Camera Assistant
Gaffer
Lighting Assistant
Art Crew
Production Assistant
Custom Device Name
Confirm

④ Tap Confirm

Remove the Device

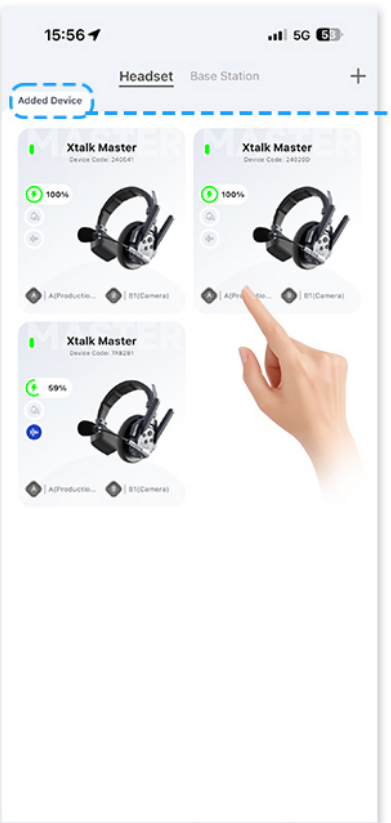
15:56
Headset
Base Station
Added Device
Xtalk Master
Xtalk Master
Xtalk Master

*Devices can only be deleted from the Added Devices page.

① Long press the headset option box

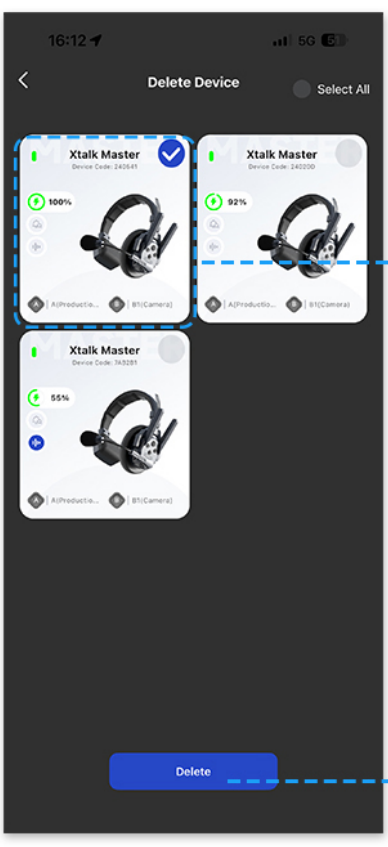
16:12
Delete Device
Select All
Xtalk Master
Xtalk Master
Xtalk Master
Delete

② Select the headset

③ Tap Delete

3.Headset Pairing

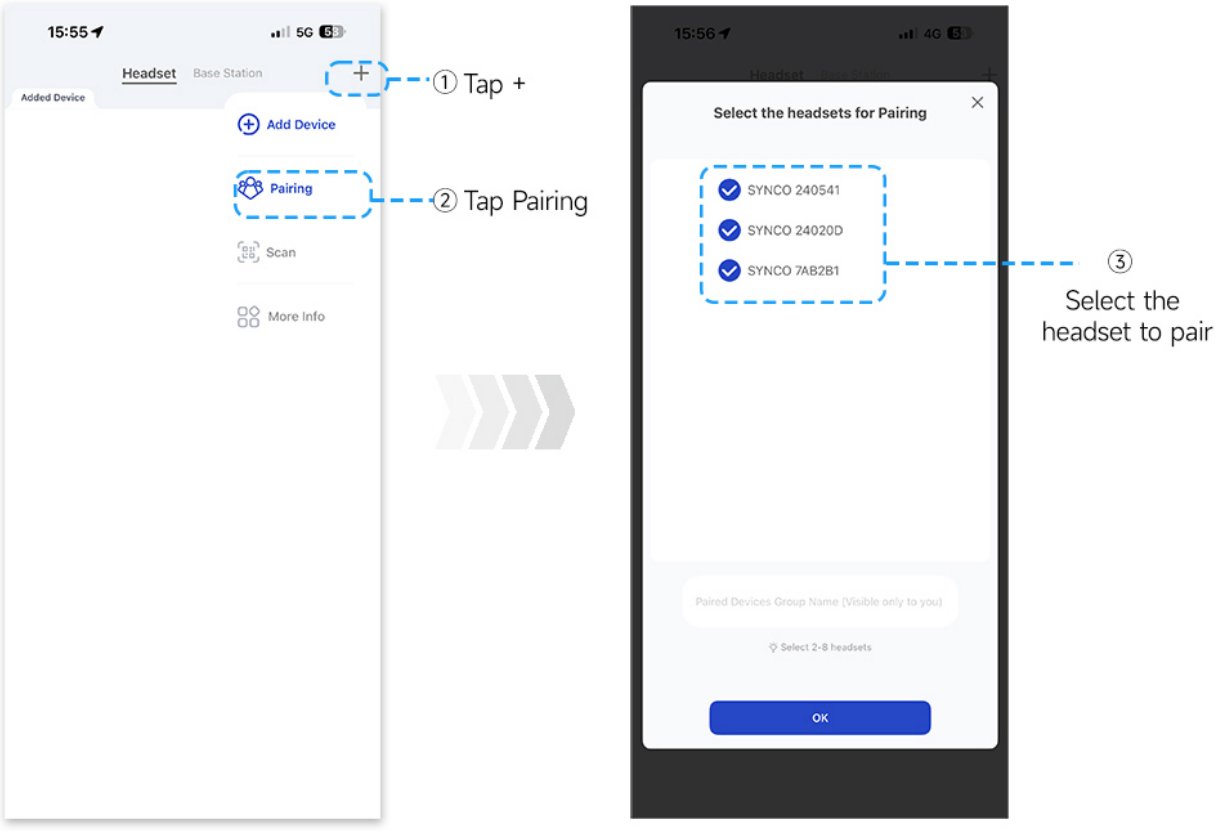
Headset
Base Station
Added Device
Add Device
Pairing
Scan
More Info
① Tap +
② Tap Pairing
Select the headsets for Pairing
SYNCO 240541
SYNCO 240203
SYNCO 7AB2B1
Select 2-8 headsets
OK
③
Select the headset to pair

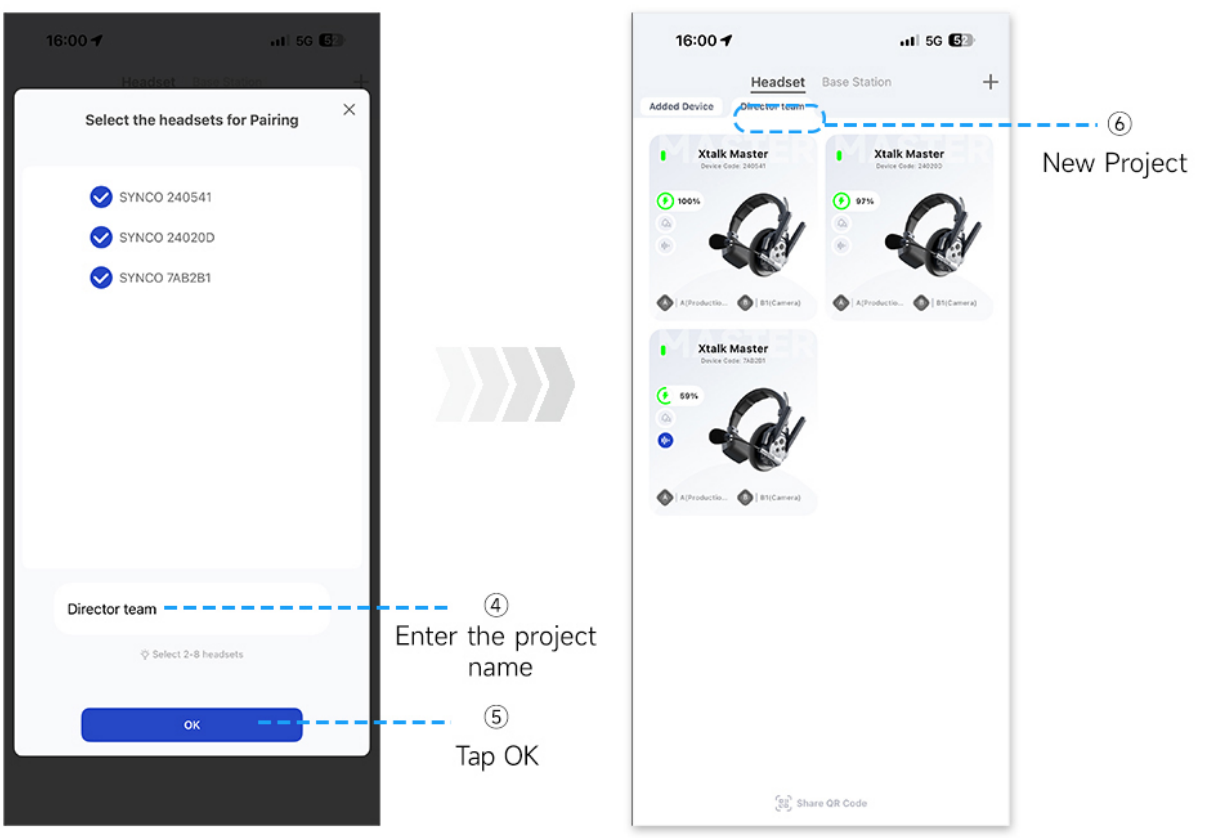
Select the headsets for Pairing
SYNCO 240541
SYNCO 240203
SYNCO 7AB2B1
Director team
Select 2-8 headsets
OK
④
Enter the project name
⑤
Tap OK
Headset
Base Station
Added Device
Director team
Xtalk Master
⑥
New Project
Share QR Code

*A project supports up to 8 devices.
*A device can belong to only one project. When added to a new project, it will be automatically unpaired from the previous one.

4.Share/Get the Project Information

Share

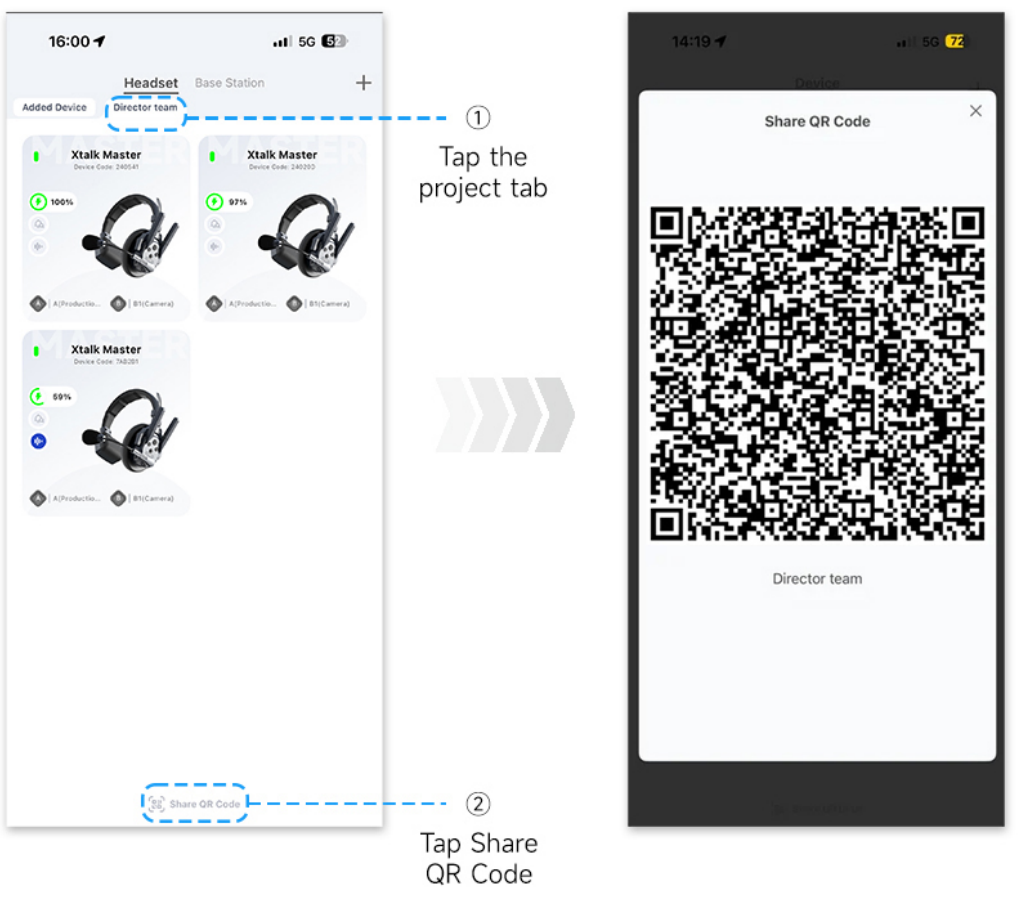
16:00
Headset
Base Station
Added Device
Director team
Xtalk Master
100%
97%
① Tap the project tab
Share QR Code
② Tap Share QR Code
Share QR Code
Director team

Get

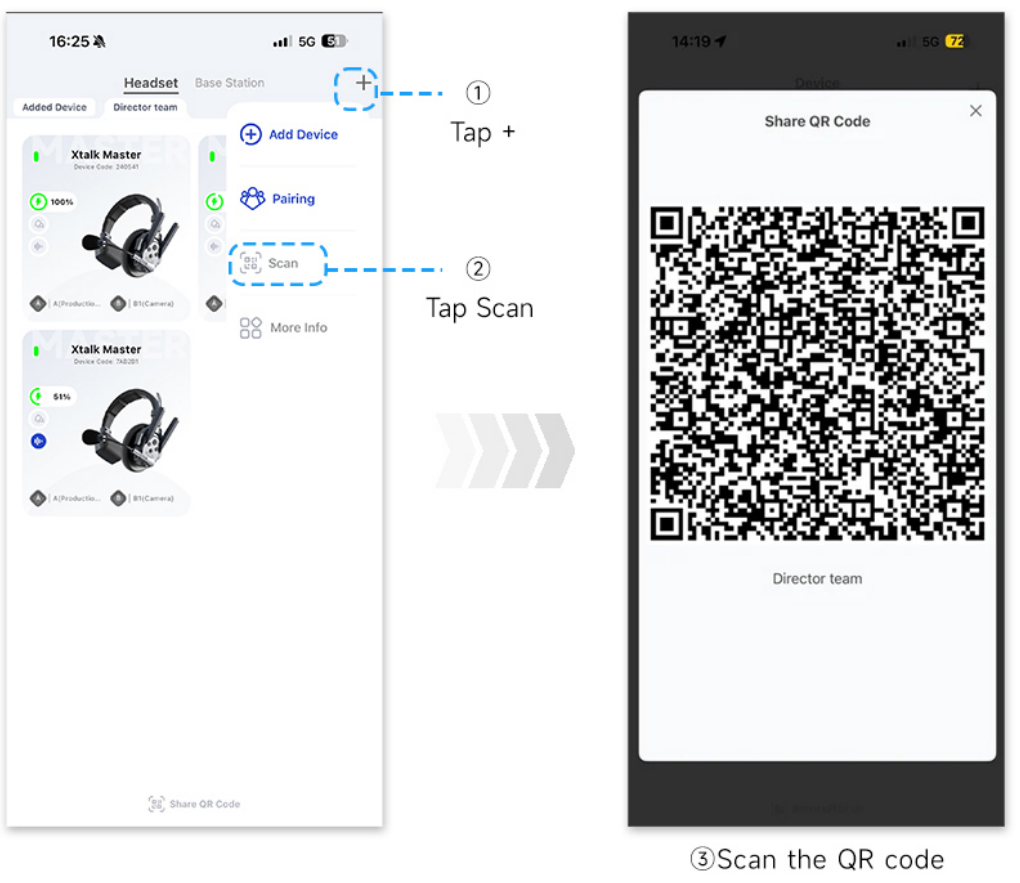
16:25
Headset
Base Station
Added Device
Director team
Add Device
Pairing
Scan
More Info
Xtalk Master
① Tap +
② Tap Scan
Share QR Code
Director team
③Scan the QR code

5.Delete the Project

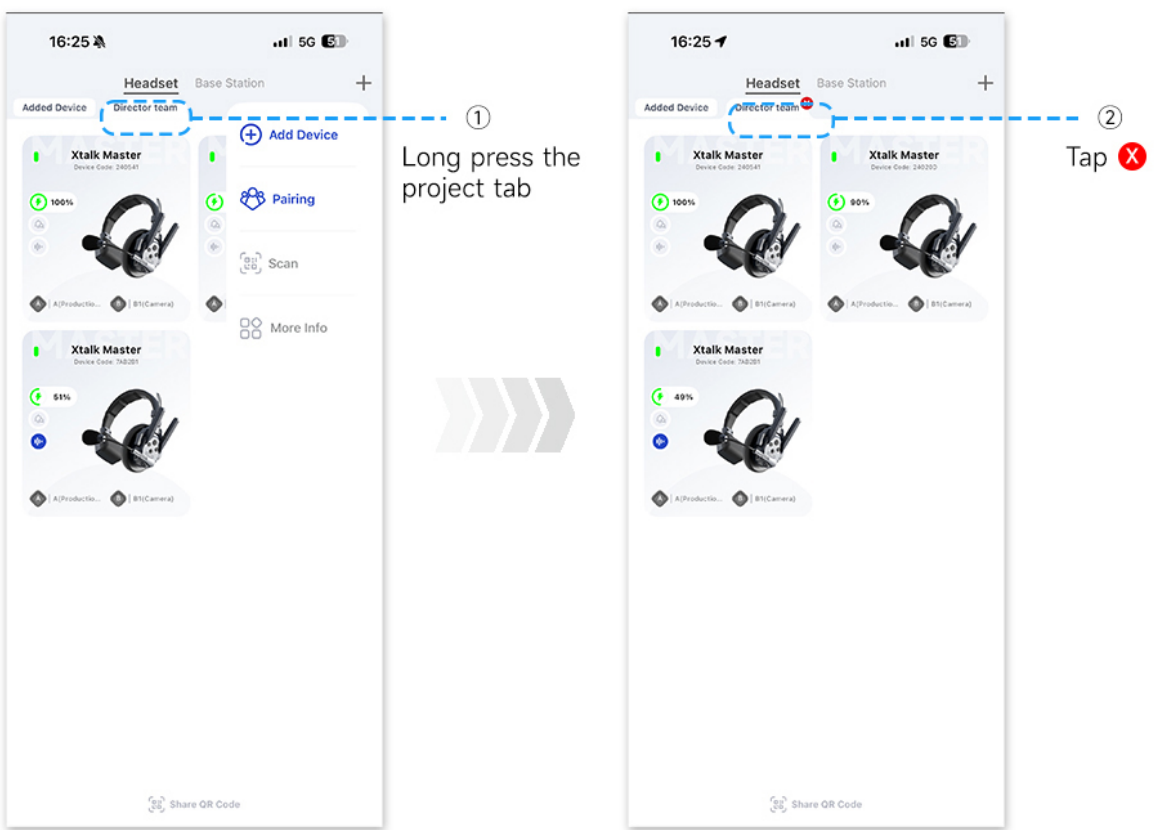
16:25
Headset
Base Station
Added Device
Director team
Add Device
Pairing
Scan
More Info
Xtalk Master
① Long press the project tab
Share QR Code
② Tap ✕

6.Group Management

6.1 Grouping Logic & Button Introduction

- The Master supports a 2-level grouping architecture with 5 groups in total: Group A, Group B1, Group B2, Group B3, and Group B4.
- Default settings:
  Group A: Management Group
  Group B1–B4: Executive Group
- Users can communicate only with members of their own group and cannot hear other groups.
- For the users who join both Group A and Group B, they can hear both groups and are usually the subgroup's leaders.

Group A (Management Group)	**Director**	**Director of Photography**	**Gaffer**
Group B1 (Camera Group)	**Director of Photography**	Camera Operator 1	Camera Operator 2

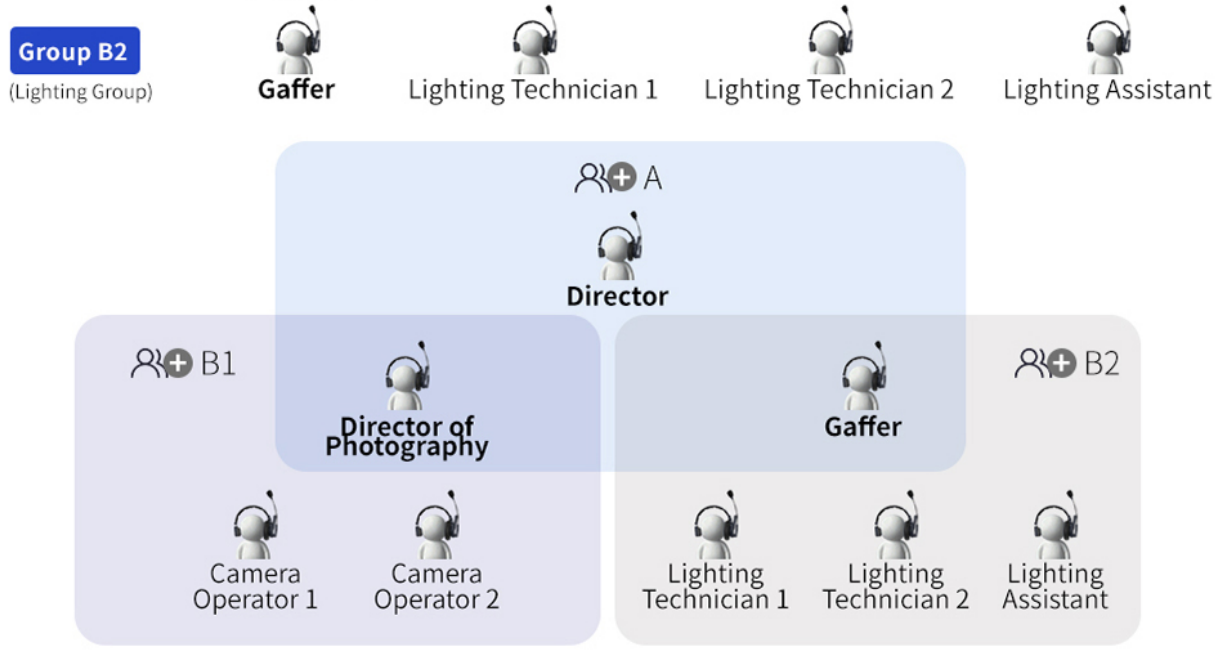
Group B2
(Lighting Group)
Gaffer
Lighting Technician 1
Lighting Technician 2
Lighting Assistant
A
Director
B1
Director of Photography
Camera Operator 1
Camera Operator 2
B2
Gaffer
Lighting Technician 1
Lighting Technician 2
Lighting Assistant

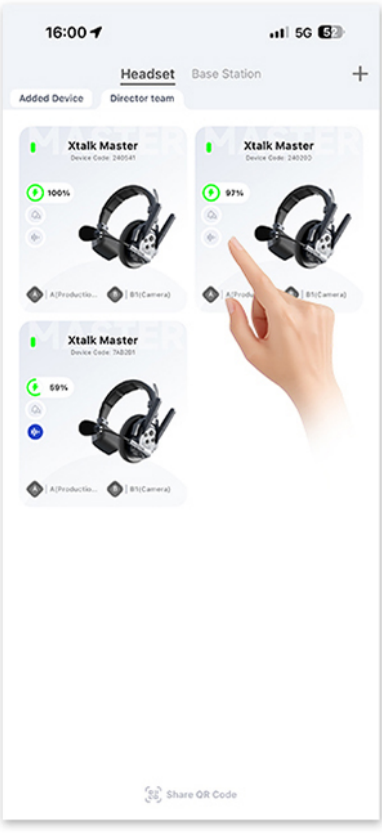
16:00
Headset
Base Station
Added Device
Director team
Xtalk Master
Xtalk Master
Xtalk Master
Share QR Code

①Tap the headset option box

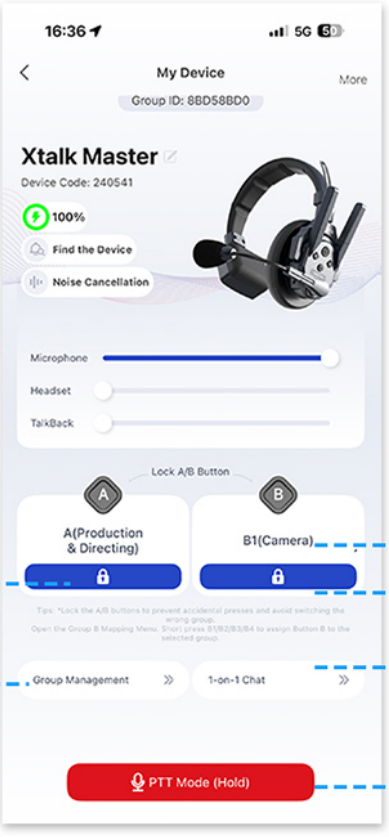
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A
B
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

Press to lock the button A

Press to open the group management menu

Press to assign the button B to Group B1/B2/B3/B4

Press to lock the button B.

Press to enter 1V1 private chat page

Long press to enter PTT mode

6.2 Enter/Exit Group

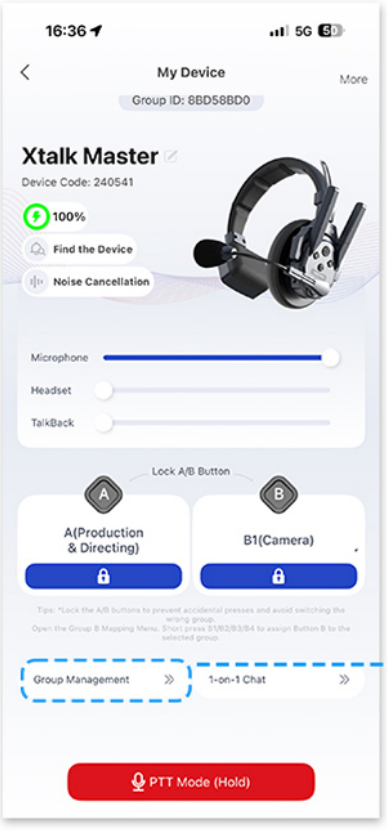
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

① Tap Group Management

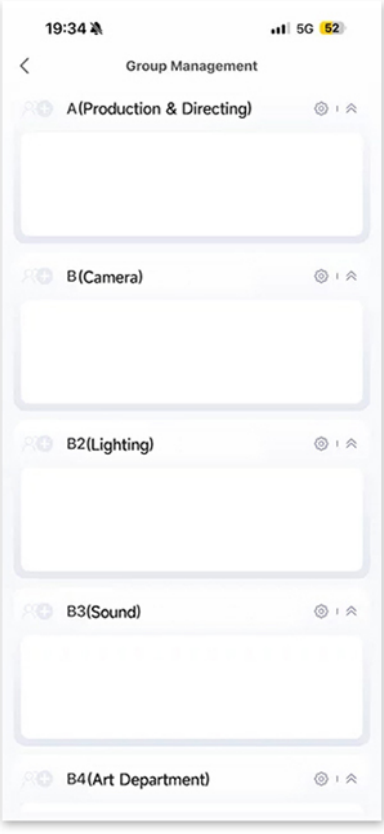
19:34
Group Management
A(Production & Directing)
B(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)

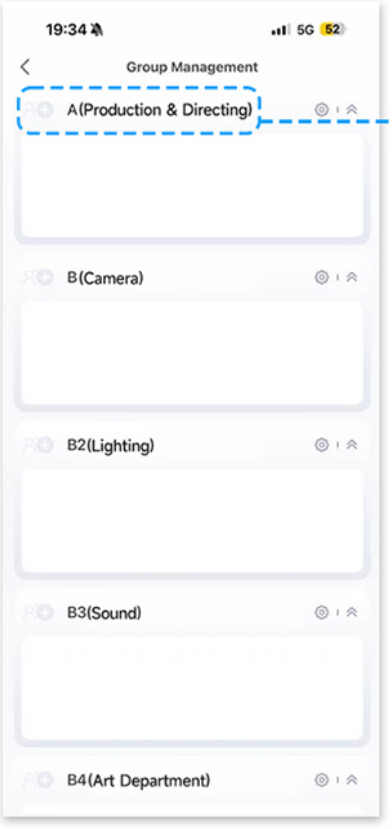
19:34
Group Management
A(Production & Directing)
B(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)

② Tap ⊕ to add

*5 groups in total

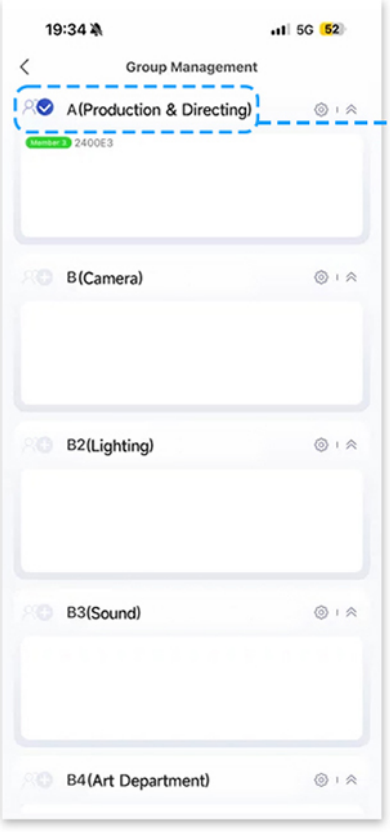
19:34
Group Management
A(Production & Directing)
2400E3
B(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)

④ Tap ✓ to remove

7.Add/Remove Group Members

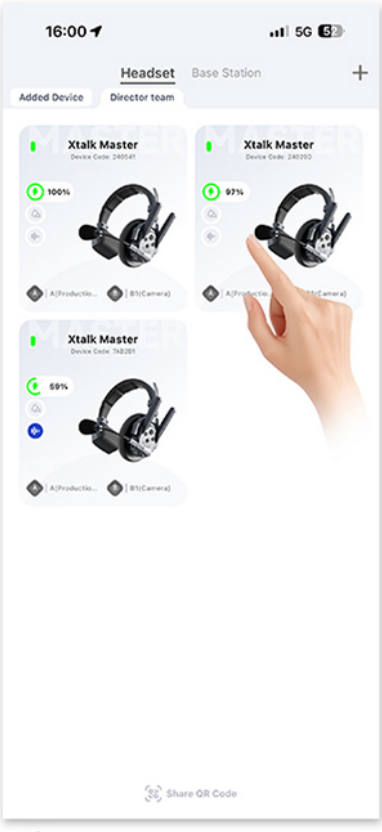
16:00
Headset
Base Station
Added Device
Director team
Xtalk Master
Xtalk Master
Xtalk Master
Share QR Code

①Tap the headset option box

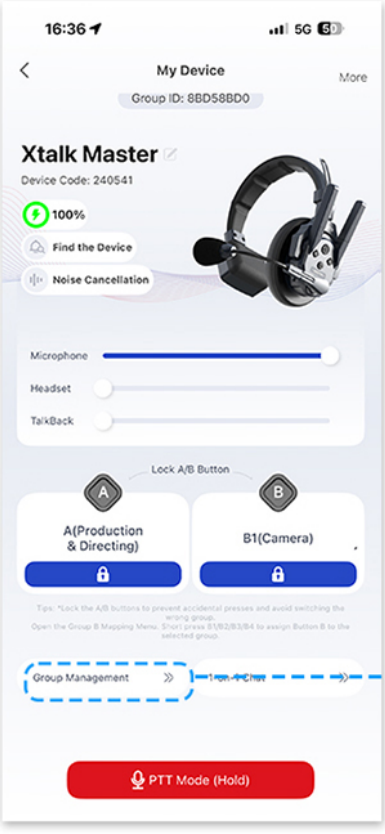
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
PTT Mode (Hold)

② Tap Group Management

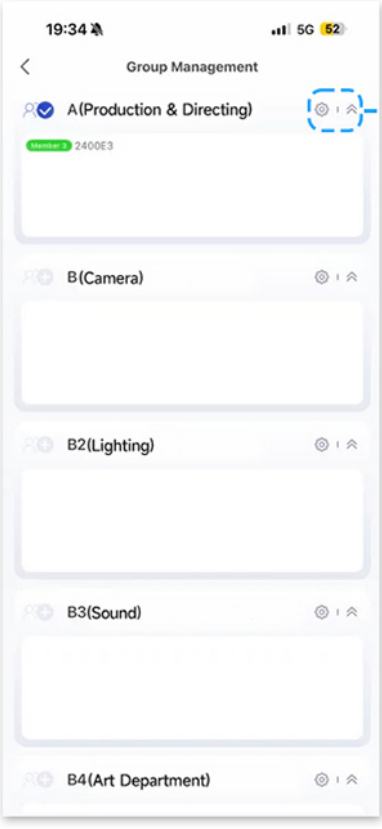
19:34
Group Management
A(Production & Directing)
2400E3
B(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)

③ Tap ⚙

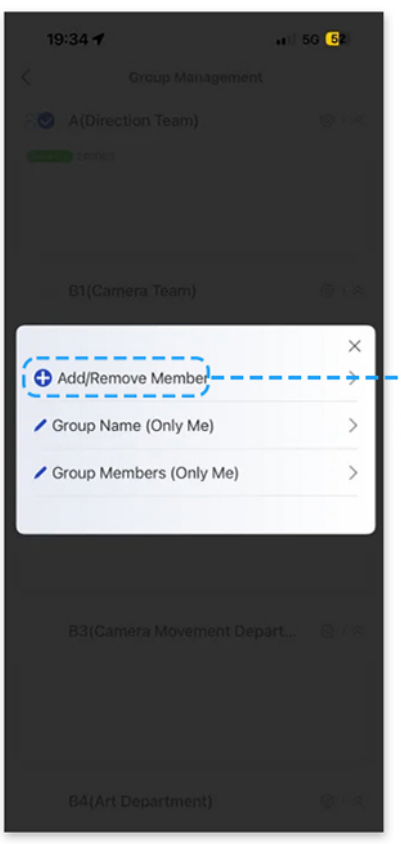
Add/Remove Member
Group Name (Only Me)
Group Members (Only Me)

④ Tap Add/ Remove Member

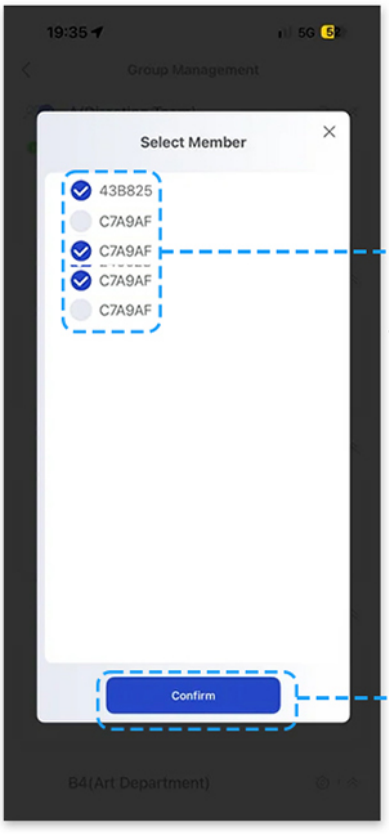
Select Member
43B825
C7A9AF
C7A9AF
C7A9AF
C7A9AF
Confirm

⑤ Select the headset(s) to add or remove

⑥ Tap Confirm

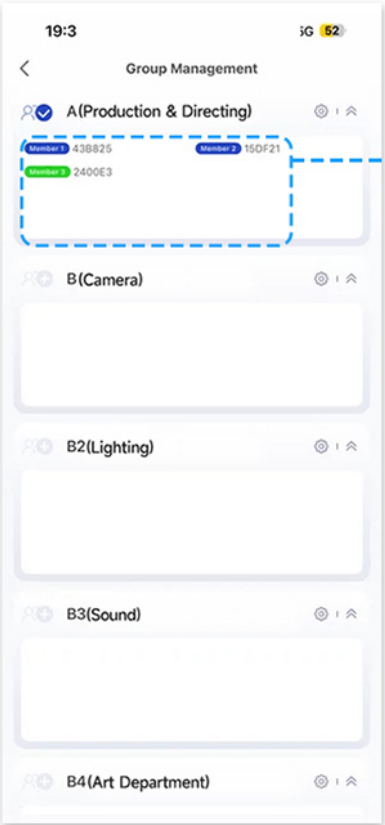
Group Management
A(Production & Directing)
B(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)

⑦ Group member list

8.Edit Group Name

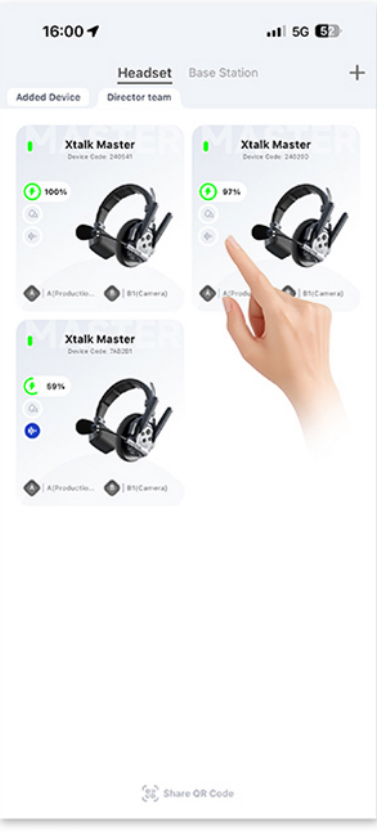
Headset
Base Station
Xtalk Master
Xtalk Master
Xtalk Master

①Tap the headset option box

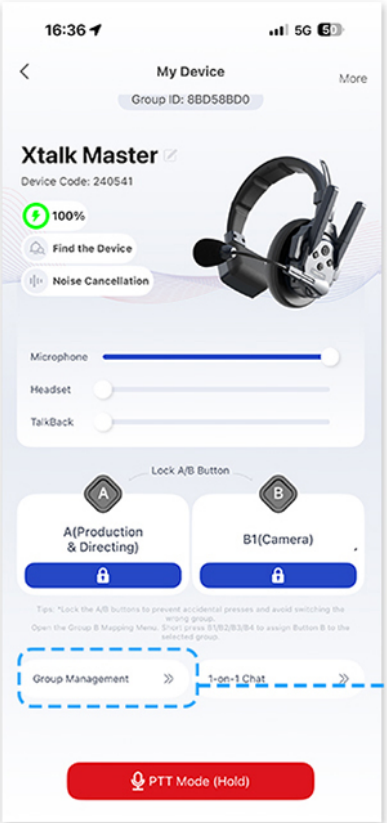
My Device
Xtalk Master
Find the Device
Noise Cancellation
Microphone
Headset
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Tap Group Management

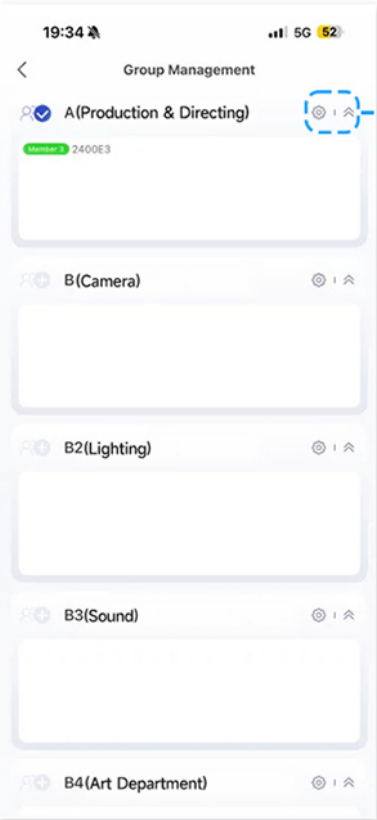
Group Management
A(Production & Directing)
B(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)

③ Tap ⚙

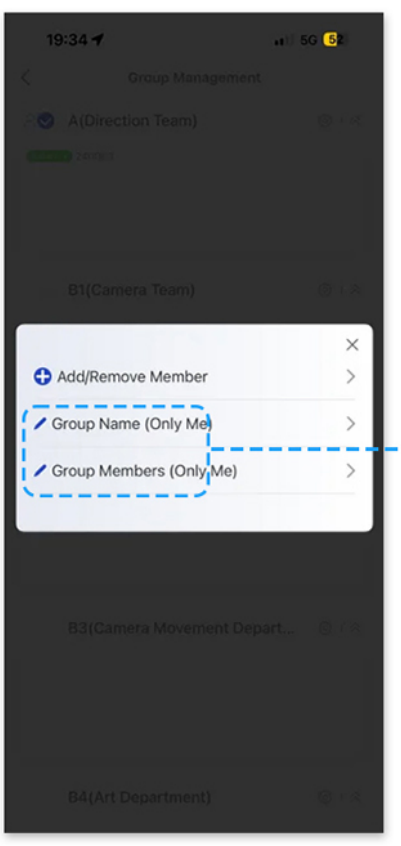
Add/Remove Member
Group Name (Only Me)
Group Members (Only Me)

④ Tap Group Name Note/ Team Member Note

Tap Group Name Note

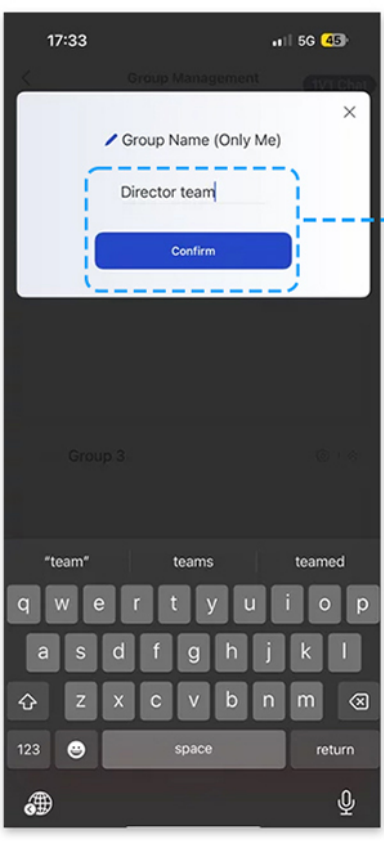
Group Name (Only Me)
Director team
Confirm

⑤ Enter the group name and tap Confirm

Tap Team Member Note

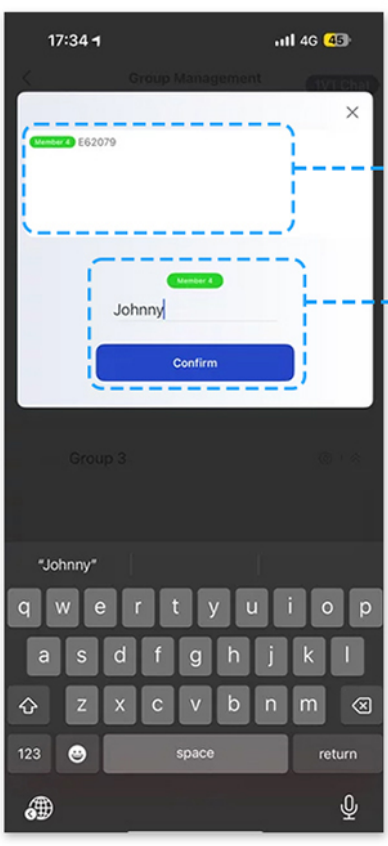
Johnny
Confirm

⑥ Select members

⑦ Enter the name and tap Confirm

9.Broadcast to One/1V1 Chat

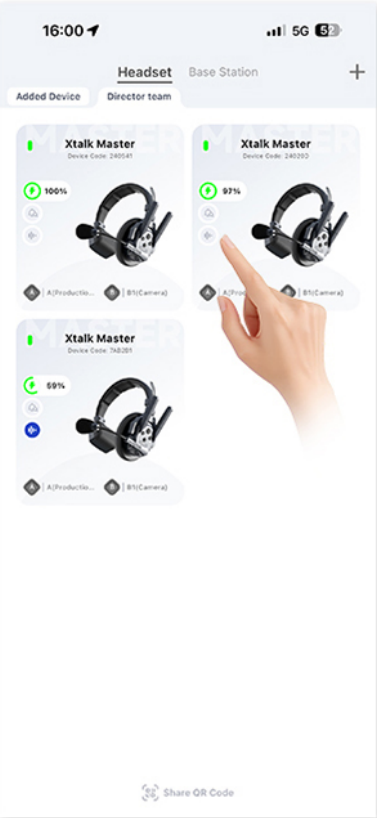
Headset
Base Station
Xtalk Master
Xtalk Master
Xtalk Master

①Tap the headset option box

Broadcast to One

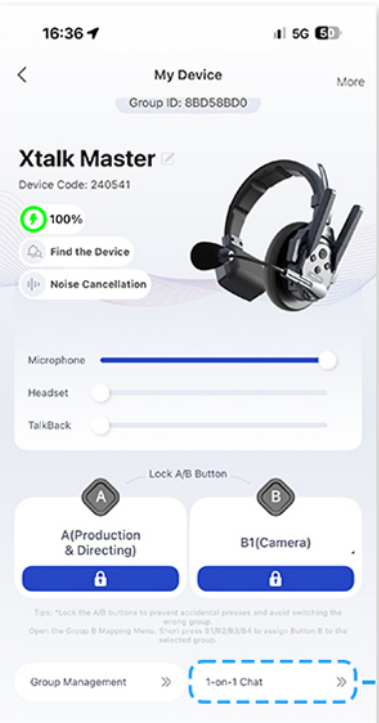
My Device
Xtalk Master
Find the Device
Noise Cancellation
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management

② Tap

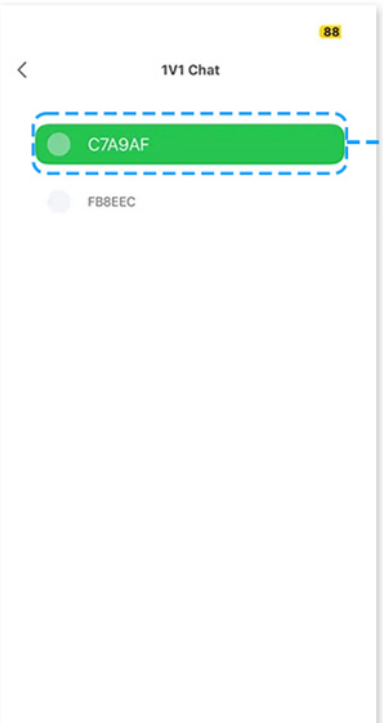
1V1 Chat
C7A9AF
F8BEEC

③ Select the headset for sending the audio

PTT Mode (Hold)
Hold to Talk

④ Press and hold the button to talk; release to end the message

1V1 Chat

Eg: User A Device Code: FB8EEC

User B Device Code: C7A94F

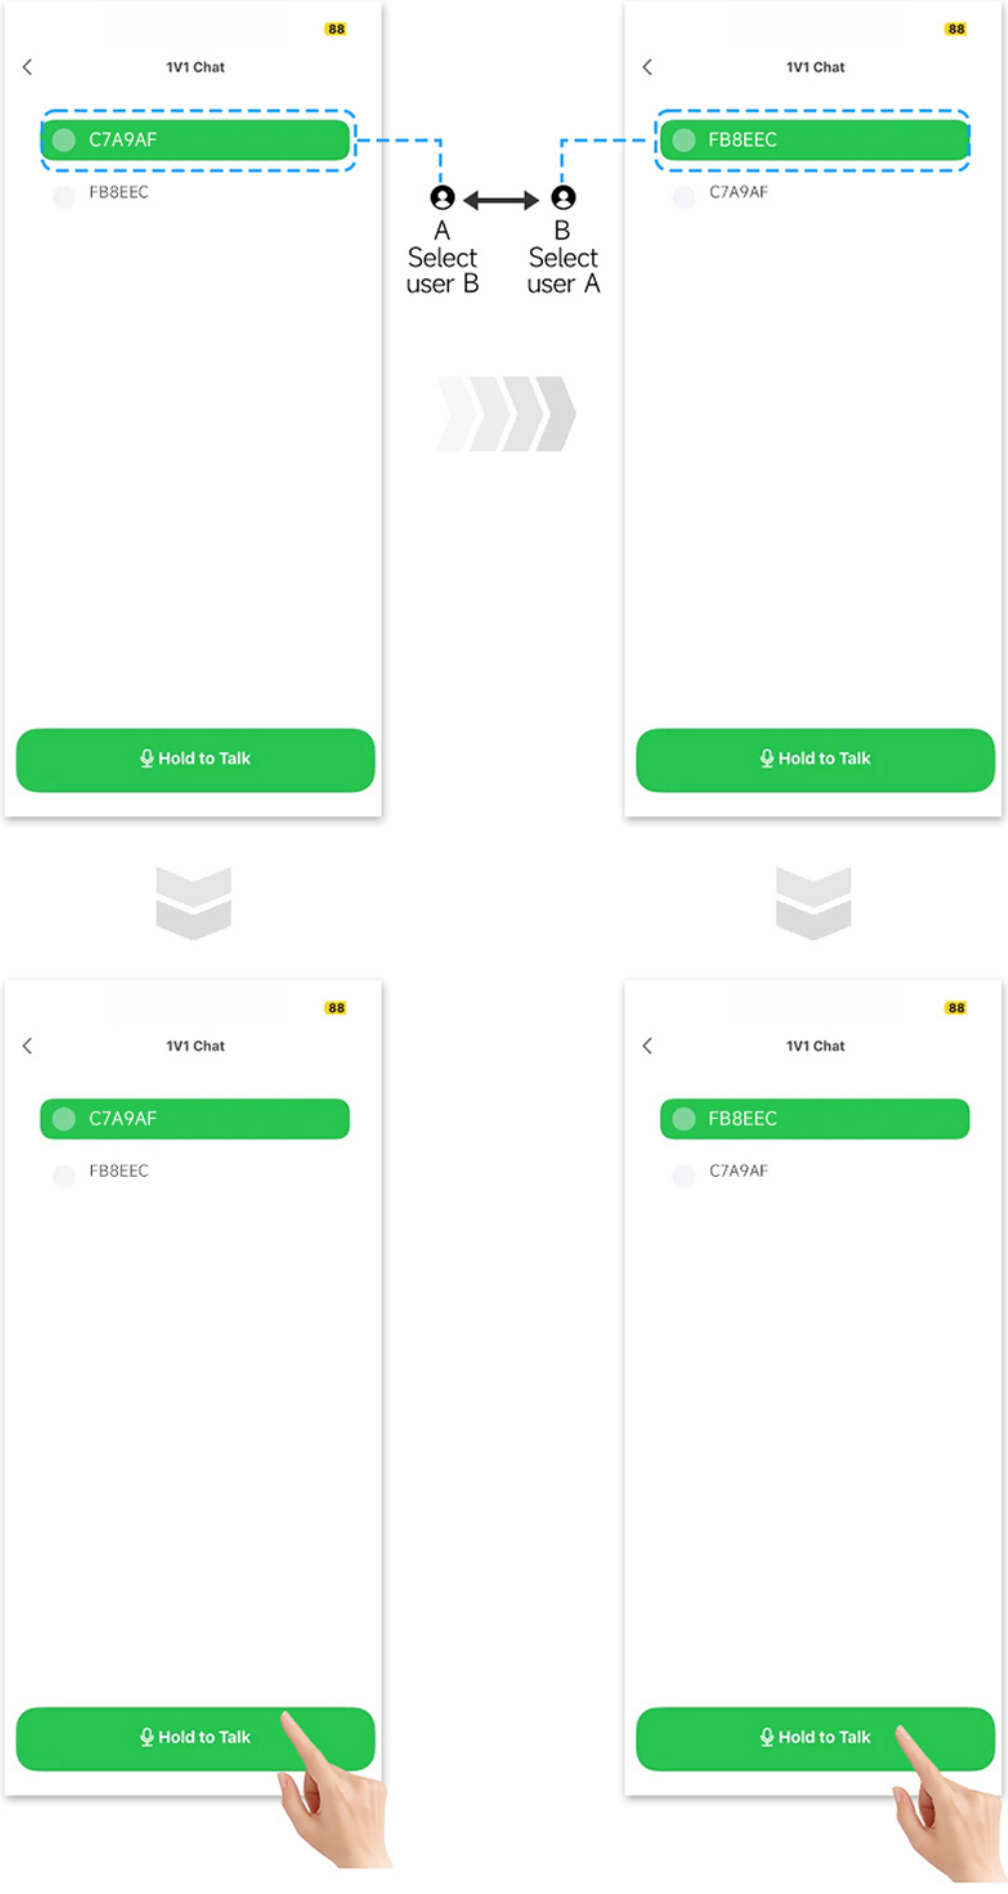
88
1V1 Chat
C7A9AF
FB8EEC
A
Select user B
B
Select user A
88
1V1 Chat
FB8EEC
C7A9AF
Hold to Talk
Hold to Talk
88
1V1 Chat
C7A9AF
FB8EEC
Hold to Talk
88
1V1 Chat
FB8EEC
C7A9AF
Hold to Talk

User A and User B press and hold the button simultaneously to enter the 1V1 Chat

10.PTT Mode

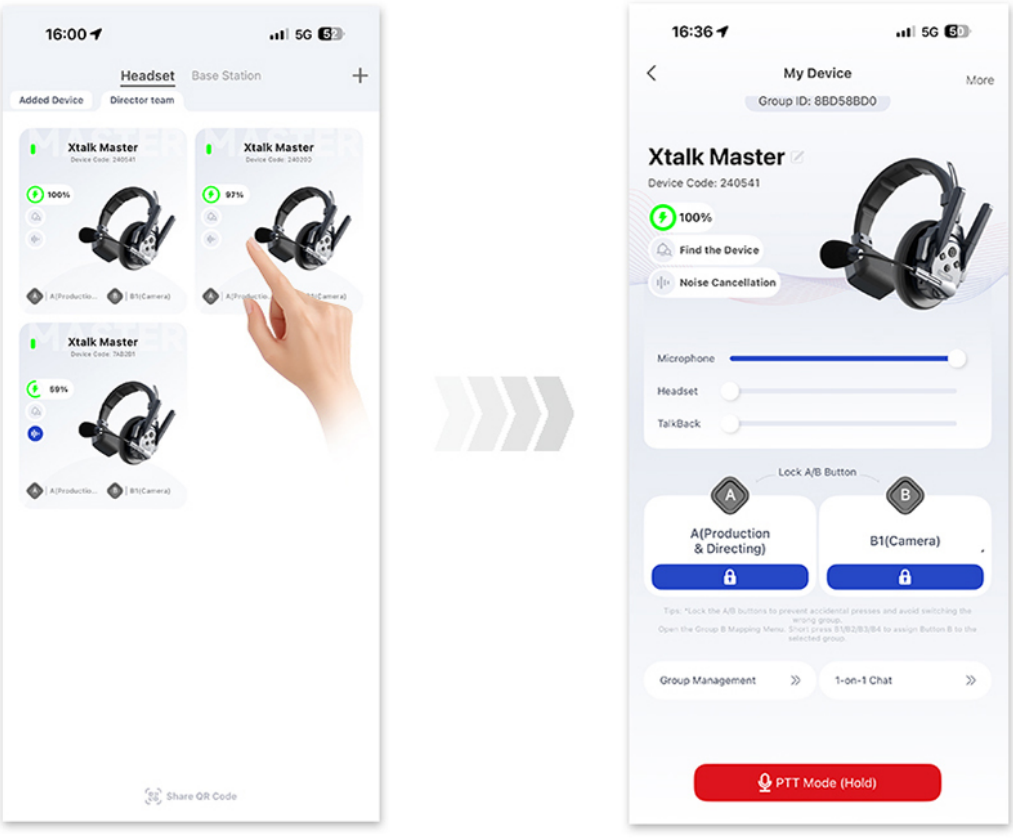
16:00
Headset
Base Station
Added Device
Director team
Xtalk Master
100%
Xtalk Master
97%
Xtalk Master
59%
Share QR Code
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

①Tap the headset option box

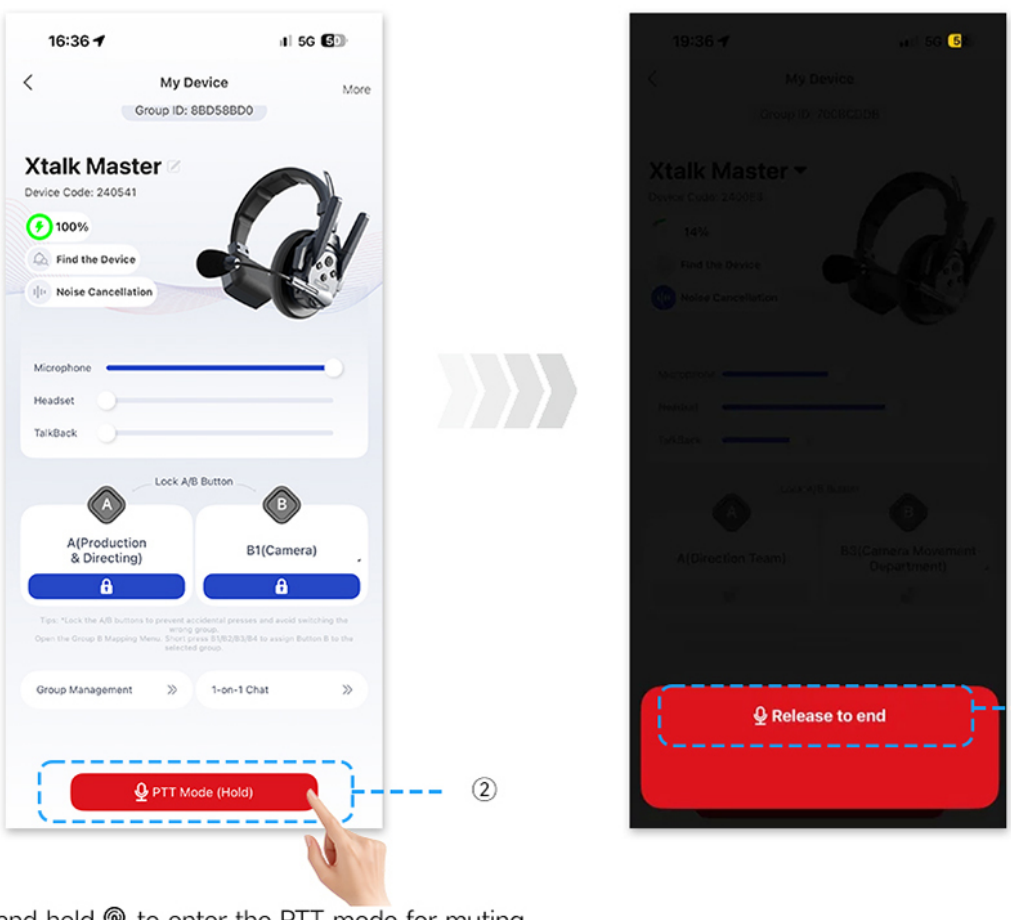
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)
Release to end

②

③ Release to exit PTT mode.

Press and hold to enter the PTT mode for muting other headsets. Others are still available for listening and only the headset that activates the PTT mode is available for speaking.



Press and hold to enter PTT mode



Release to exit PTT mode

11.Boom Arm Toggle Sound

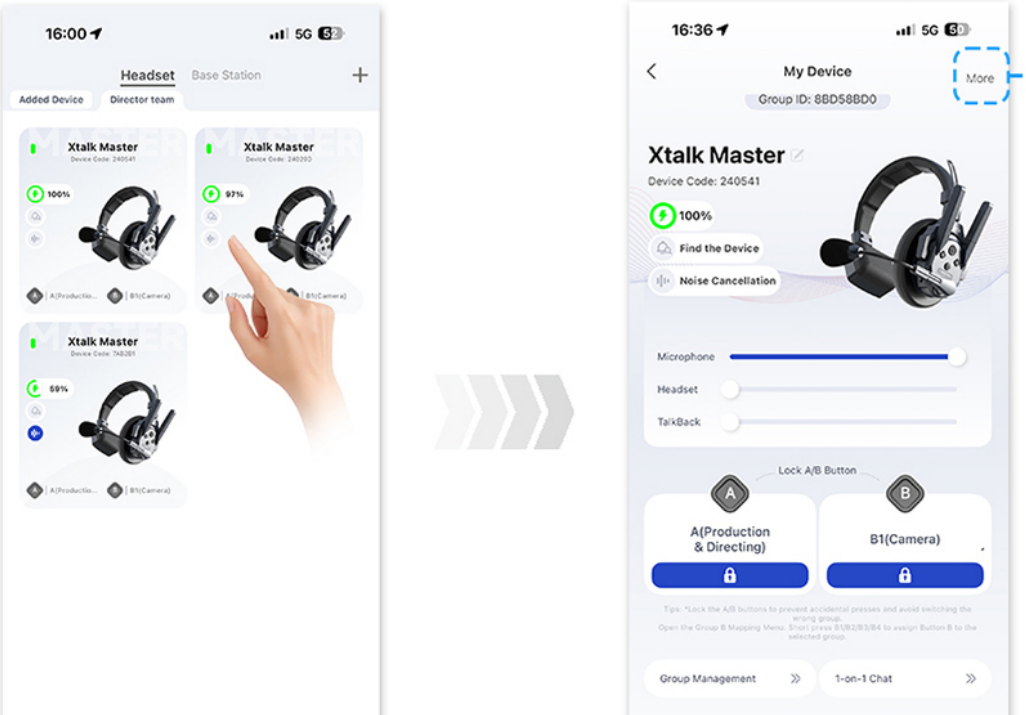
16:00
Headset
Base Station
Added Device
Director team
Xtalk Master
Xtalk Master
Xtalk Master
16:36
My Device
More
Group ID: 8BD58BD0
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat

② Tap More

Share QR Code


PTT Mode (Hold)

①Tap the headset option box

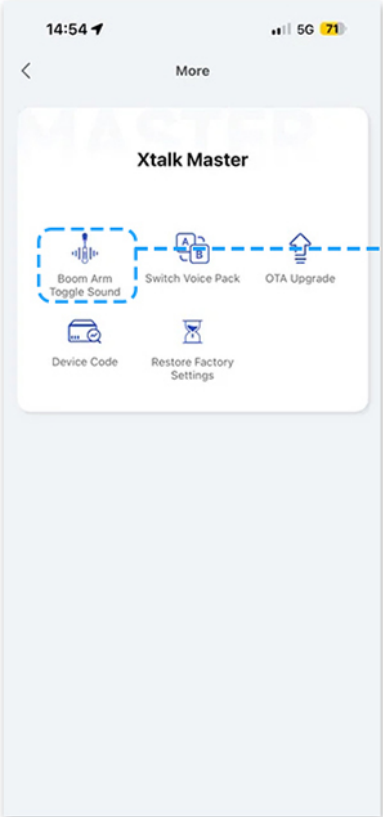
14:54
5G 71
More
Xtalk Master
Boom Arm Toggle Sound
Switch Voice Pack
OTA Upgrade
Device Code
Restore Factory Settings

③ Tap Boom Arm Toggle Sound

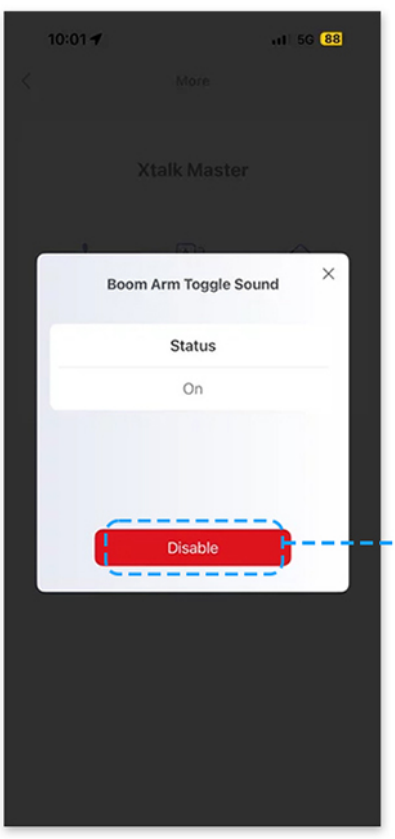
10:01
5G 88
More
Xtalk Master
Boom Arm Toggle Sound
Status
On
Disable

④ Tap Disable/Enable

12.Switch Voice Pack

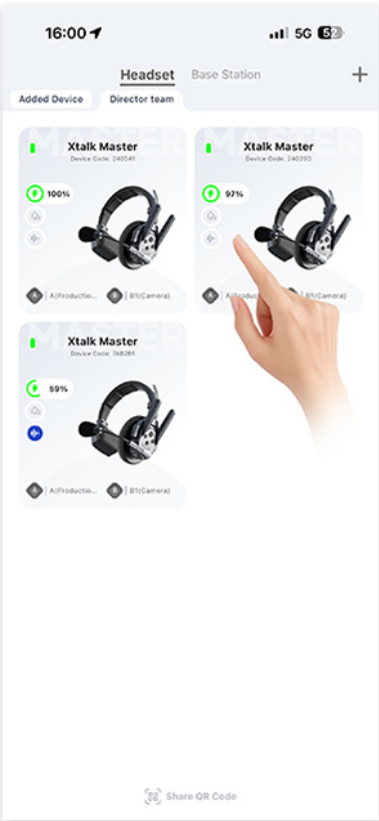
16:00
5G 52
Headset
Base Station
+
Added Device
Director team
Xtalk Master
100%
Xtalk Master
97%
Xtalk Master
59%
A(Productio...
B1(Camera)
Share QR Code

①Tap the headset option box

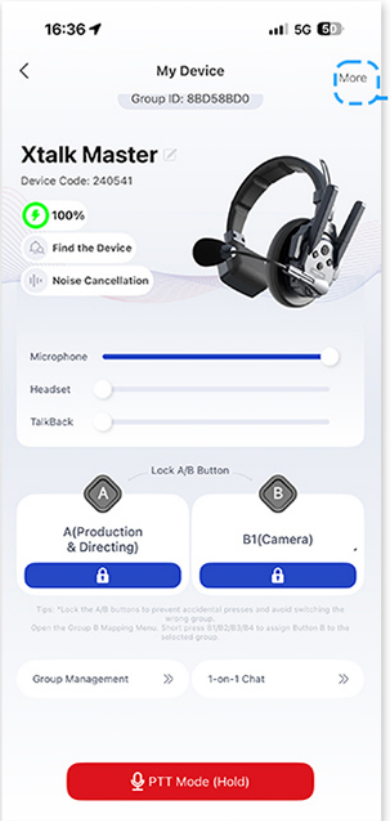
16:36
5G 50
My Device
Group ID: 8BD58BD0
More
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Tap More

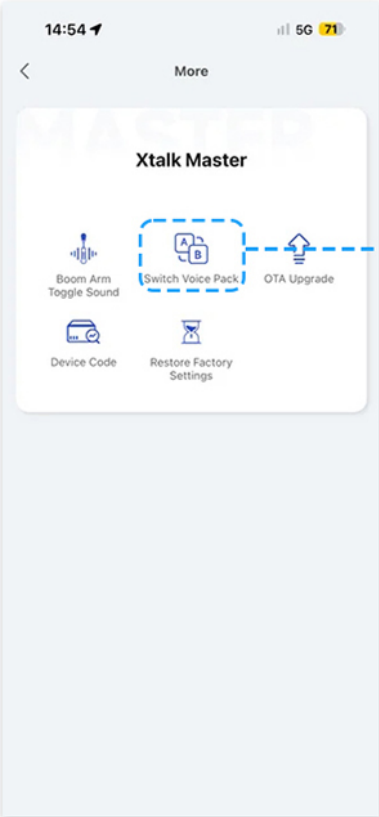
14:54
5G 71
More
Xtalk Master
Boom Arm Toggle Sound
Switch Voice Pack
OTA Upgrade
Device Code
Restore Factory Settings

③ Tap Switch Voice Pack

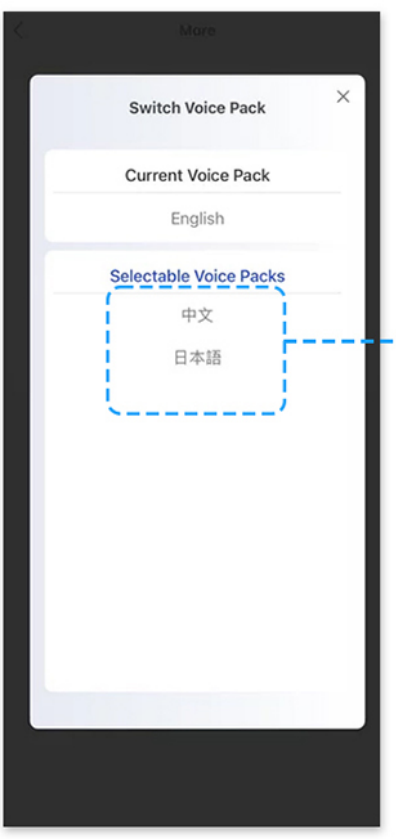
More
Switch Voice Pack
Current Voice Pack
English
Selectable Voice Packs
中文
日本語

④ Select the language

*Do not leave the page during the process, and keep the headset powered on

13.OTA Update

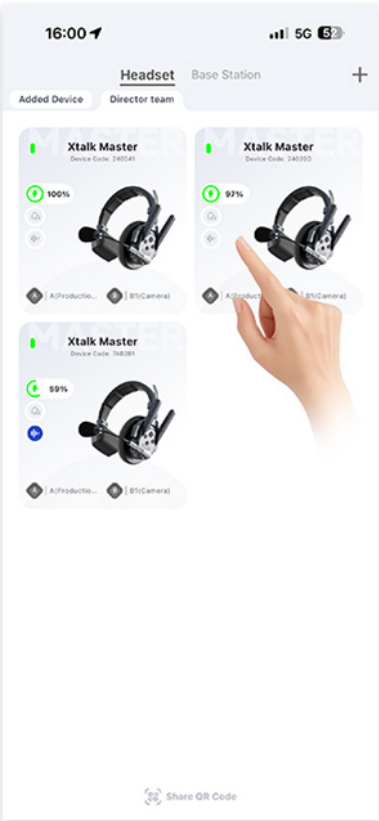
16:00
5G 52
Headset
Base Station
+
Added Device
Director team
Xtalk Master
100%
Xtalk Master
97%
Xtalk Master
59%
A(Productio...
B1(Camera)
Share QR Code

①Tap the headset option box

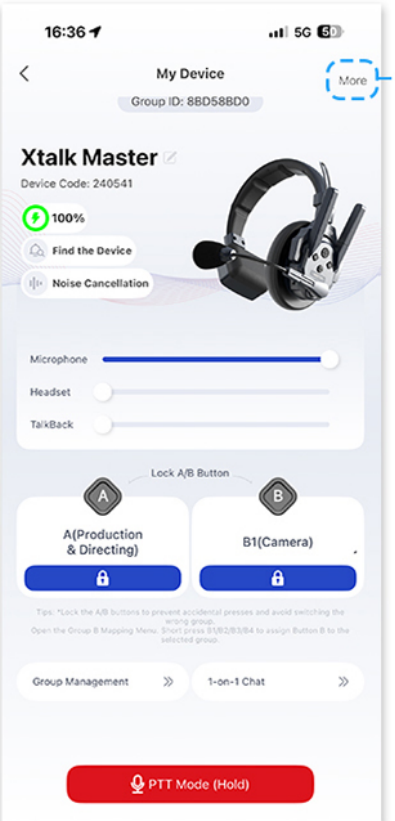
16:36
5G 50
My Device
Group ID: 8BD58BD0
More
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Tap More

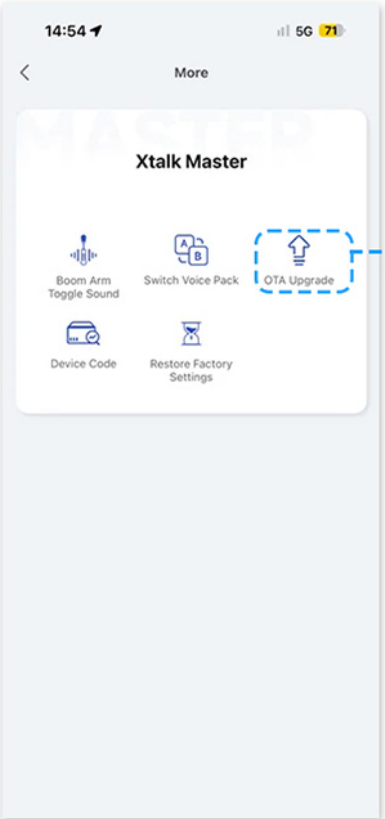
14:54
5G 71
More
Xtalk Master
Boom Arm Toggle Sound
Switch Voice Pack
OTA Upgrade
Device Code
Restore Factory Settings

③ Tap OTA Upgrade

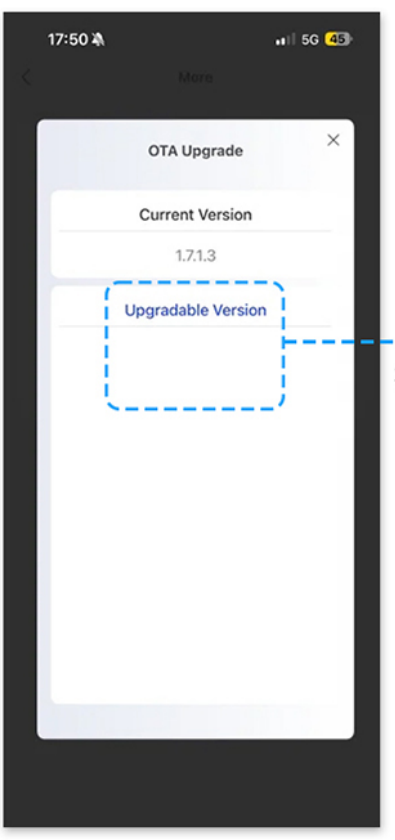
17:50
5G 45
More
OTA Upgrade
Current Version
1.7.1.3
Upgradable Version

④ Select the version to update

*If the firmware is already up to date, the app will not display the upgradable version

14. Restore Factory Settings


16:00
5G 52
Headset
Base Station
+
Added Device
Director team


16:36
5G 50
My Device
Group ID: 8BD58BD0
More

② Tap More


Xtalk Master
Xtalk Master
Xtalk Master
100%
97%
99%
Share QR Code


Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A
B
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

①Tap the headset option box

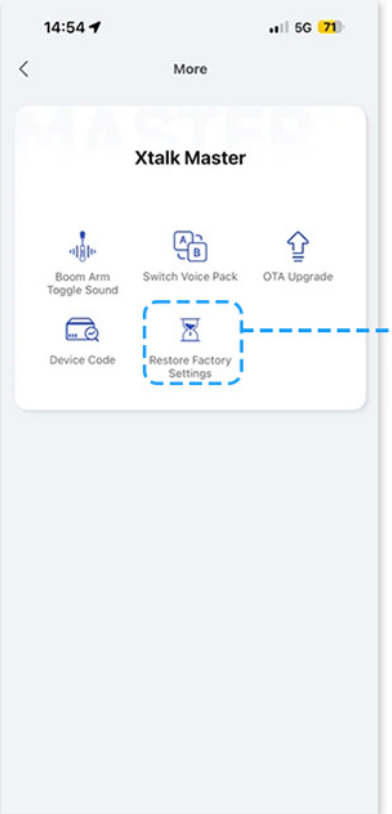
14:54
More
Xtalk Master
Boom Arm Toggle Sound
Switch Voice Pack
OTA Upgrade
Device Code
Restore Factory Settings

③ Tap Restore Factory Settings

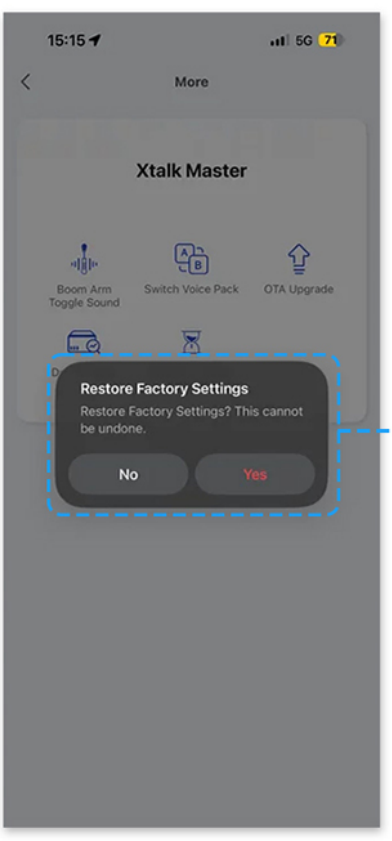
15:15
More
Xtalk Master
Boom Arm Toggle Sound
Switch Voice Pack
OTA Upgrade

Restore Factory Settings

Restore Factory Settings? This cannot be undone.

No Yes

④ Tap Confirm

15.Microphone/Headset/Talkback Volume Control

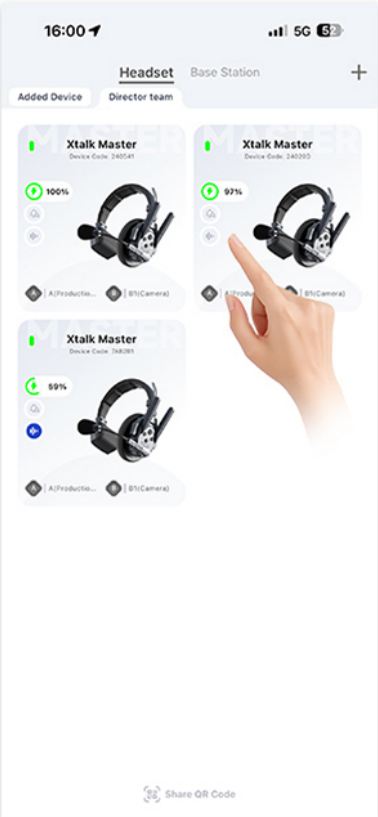
16:00
Headset
Base Station
+
Added Device
Director team
Xtalk Master
Xtalk Master
Xtalk Master
100%
97%
99%
Share QR Code

①Tap the headset option box

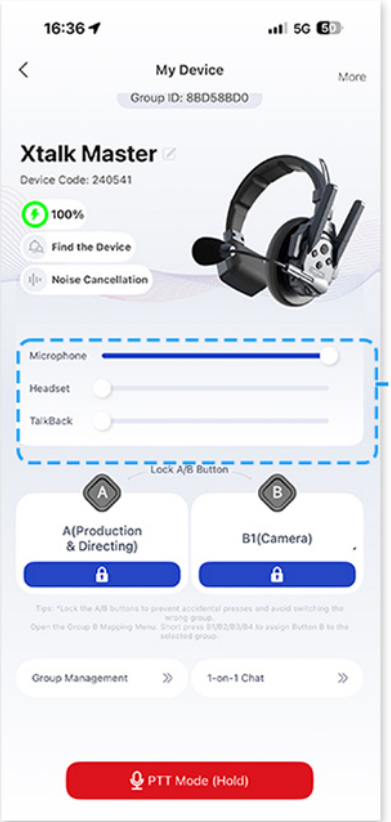
16:36
My Device
Group ID: 8BD58BD0
More
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Slide the volume bar to adjust the volume.

16.Noise Cancellation On/Off

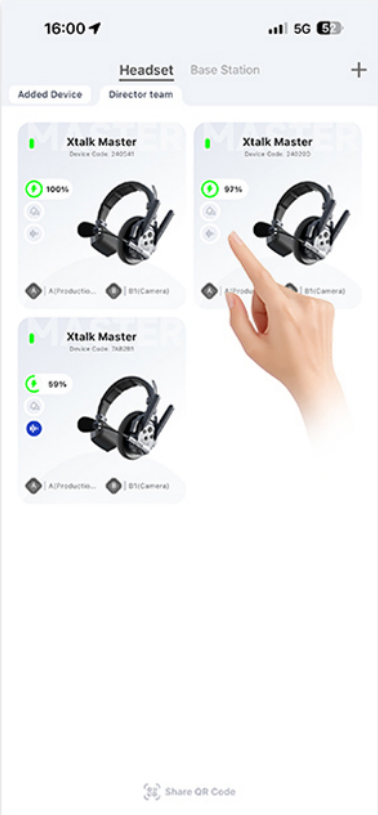
16:00
Headset
Base Station
+
Added Device
Director team
Xtalk Master
Xtalk Master
Xtalk Master
100%
97%
99%
Share QR Code

①Tap the headset option box

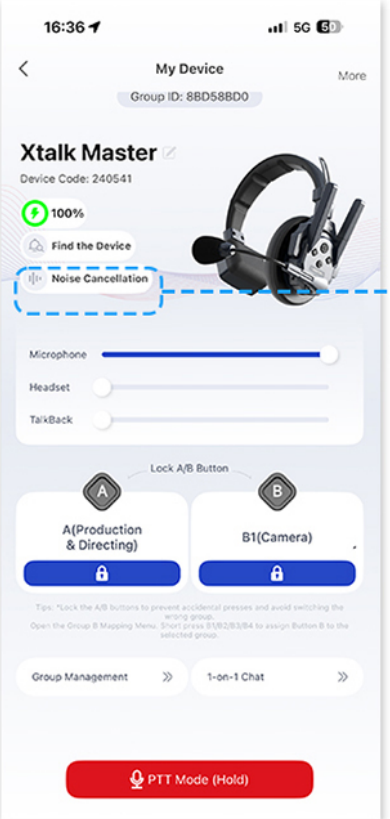
16:36
My Device
Group ID: 8BD58BD0
More
Xtalk Master
Device Code: 240541
100%
Find the Device
Noise Cancellation
Microphone
Headset
TalkBack
Lock A/B Button
A(Production & Directing)
B1(Camera)
Group Management
1-on-1 Chat
PTT Mode (Hold)

② Tap the noise cancellation icon.

Noise Cancellation Off

Noise Cancellation On

17.App Upgrade

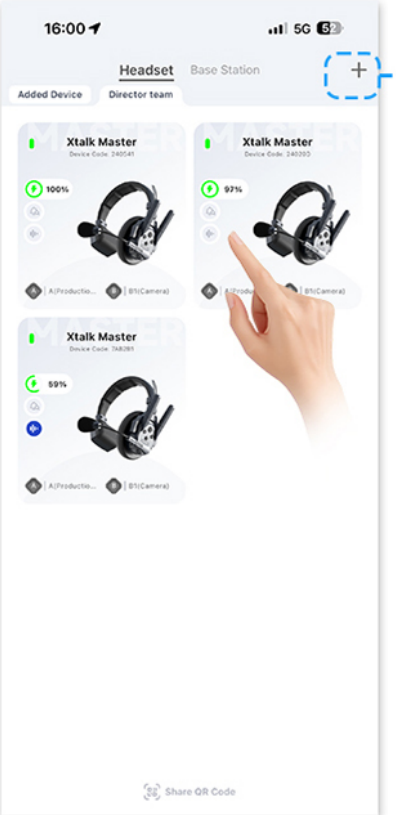
16:00
Headset
Base Station
+
Added Device
Director team
Xtalk Master
Xtalk Master
Xtalk Master
100%
97%
99%
Share QR Code

①Tap +

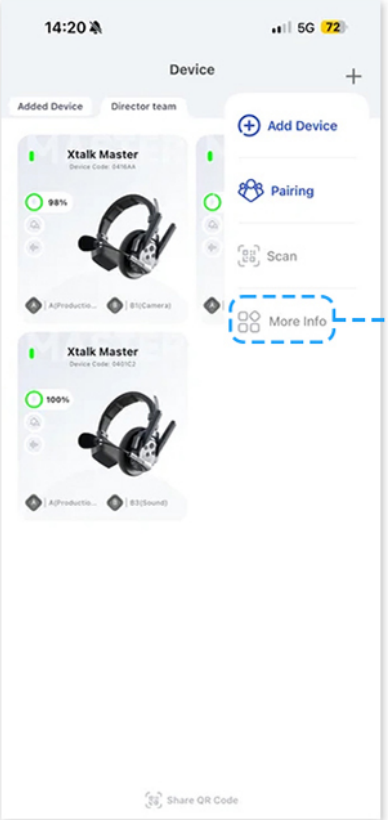
14:20
Device
+
Added Device
Director team
Xtalk Master
Xtalk Master
Add Device
Pairing
Scan
More Info
Share QR Code

② Tap More Info

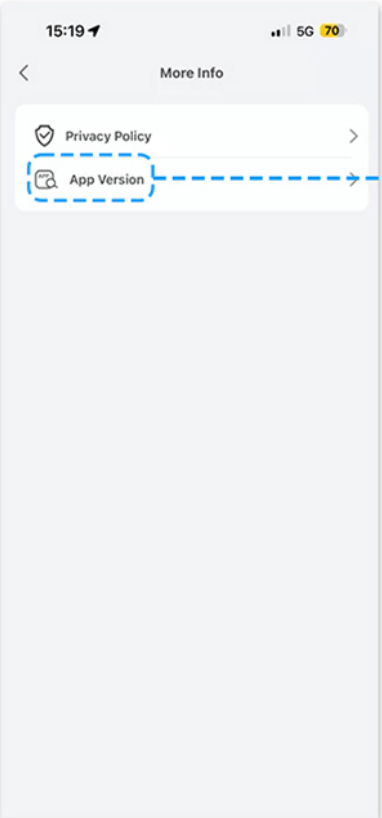
15:19
More Info
Privacy Policy
App Version

③ Tap App Version

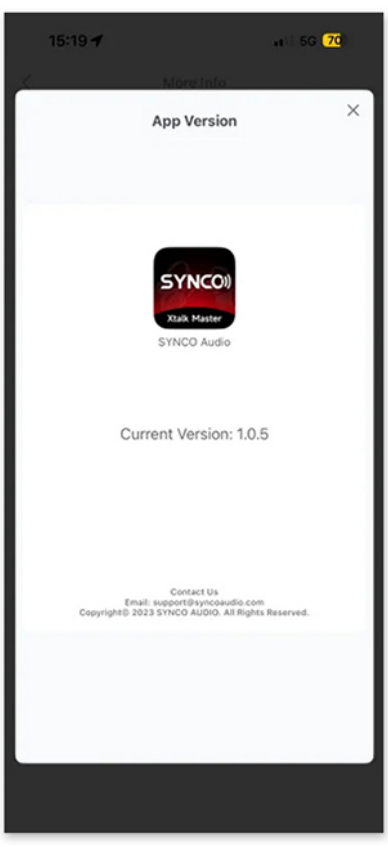
15:19
SYNCO
Xtalk Master

App Version

SYNCO Audio

Current Version: 1.0.5

Contact Us
Email: support@syncoaudio.com
Copyright© 2023 SYNCO AUDIO. All Rights Reserved.

XStation

Base Station

Power Indicator Light
XStation
A
B1
B2
B3
B4

1.Add/Remove XStation

1.1 Add the Device

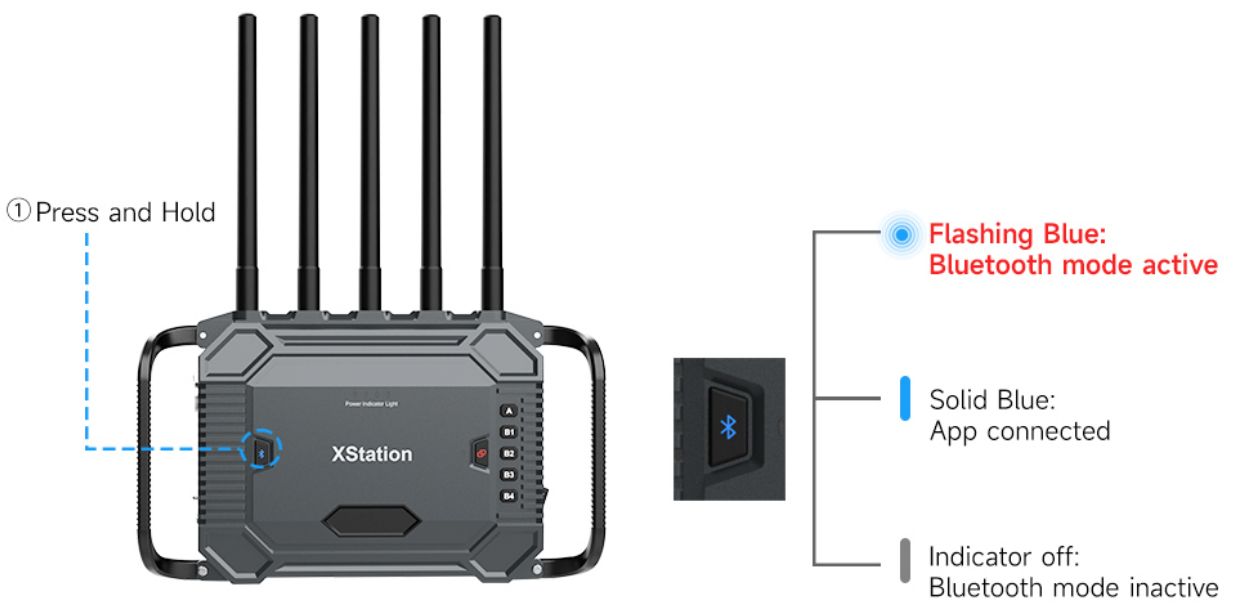

① Press and Hold

Flashing Blue:
Bluetooth mode active

Solid Blue:
App connected

Indicator off:
Bluetooth mode inactive

SYNCO
Xtalk Master

Open the SYNCO AUDIO App

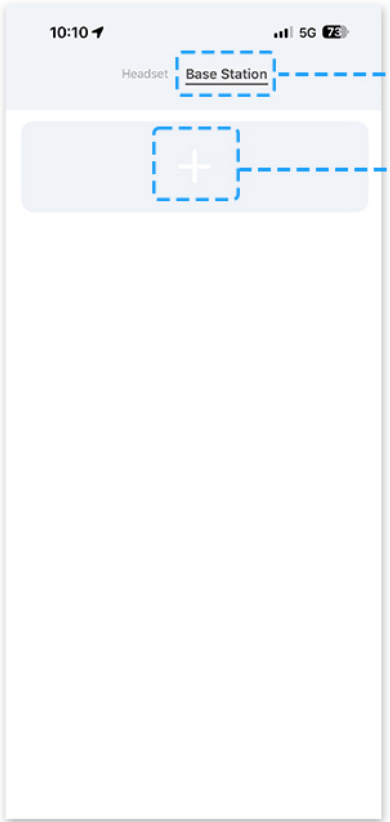
10:10
5G 73
Headset
Base Station
+

① Tap

② Tap+

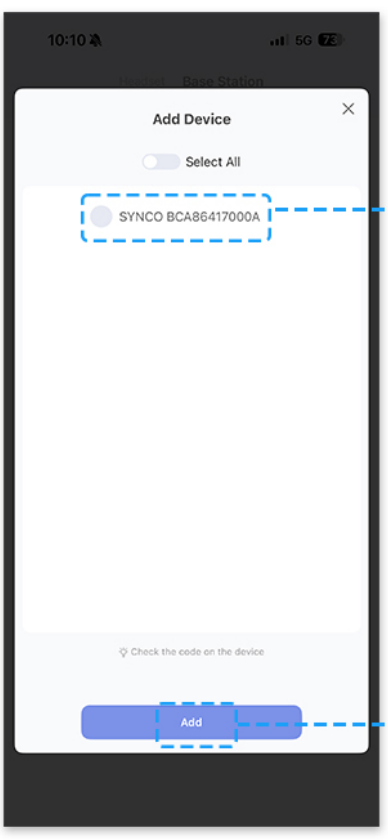
10:10
5G 73
Add Device
Select All
Add

SYNCO BCA86417000A

Check the code on the device

③ Select device

④ Tap

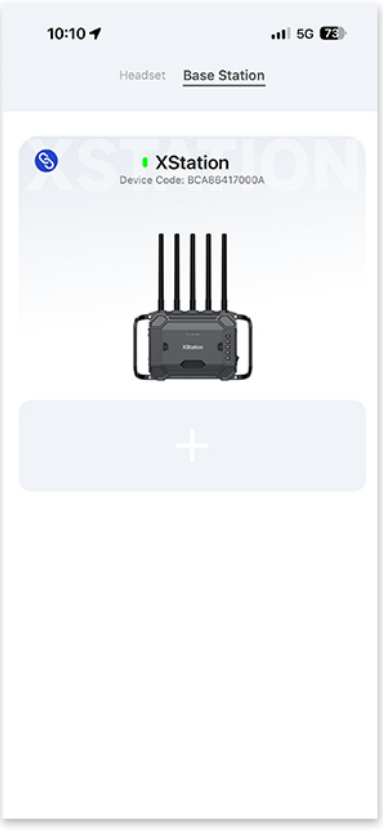
10:10
5G 73
Headset
Base Station
XSTATION
+

XStation
Device Code: BCA86417000A

1.2 Remove the Device

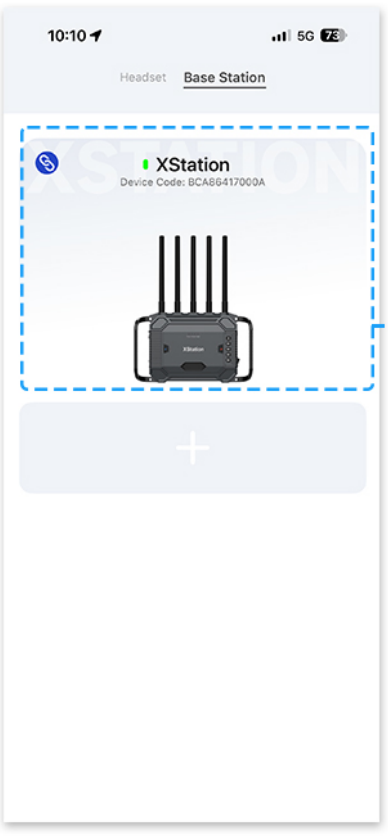
10:10
5G 73
Headset
Base Station
XSTATION
+

XStation
Device Code: BCA86417000A

① Long press

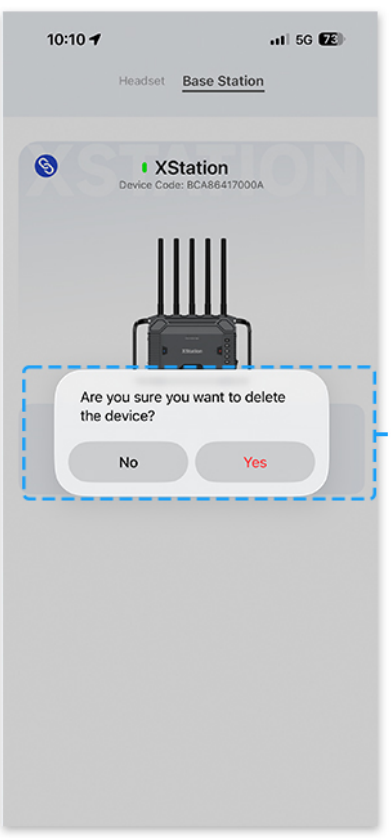
10:10
5G 73
Headset
Base Station
XSTATION
No
Yes

XStation
Device Code: BCA86417000A

Are you sure you want to delete the device?

② Tap

2.Headset Pairing

2.1 No Grouping Required


10:10
5G 73
Headset
Base Station
XSTATION

XStation
Device Code: BCA86417000A

① Tap


10:12
5G 73
Base Station
More
XSTATION
XStation

XStation
Device Code: BCA86417000A

DC
Power Connected

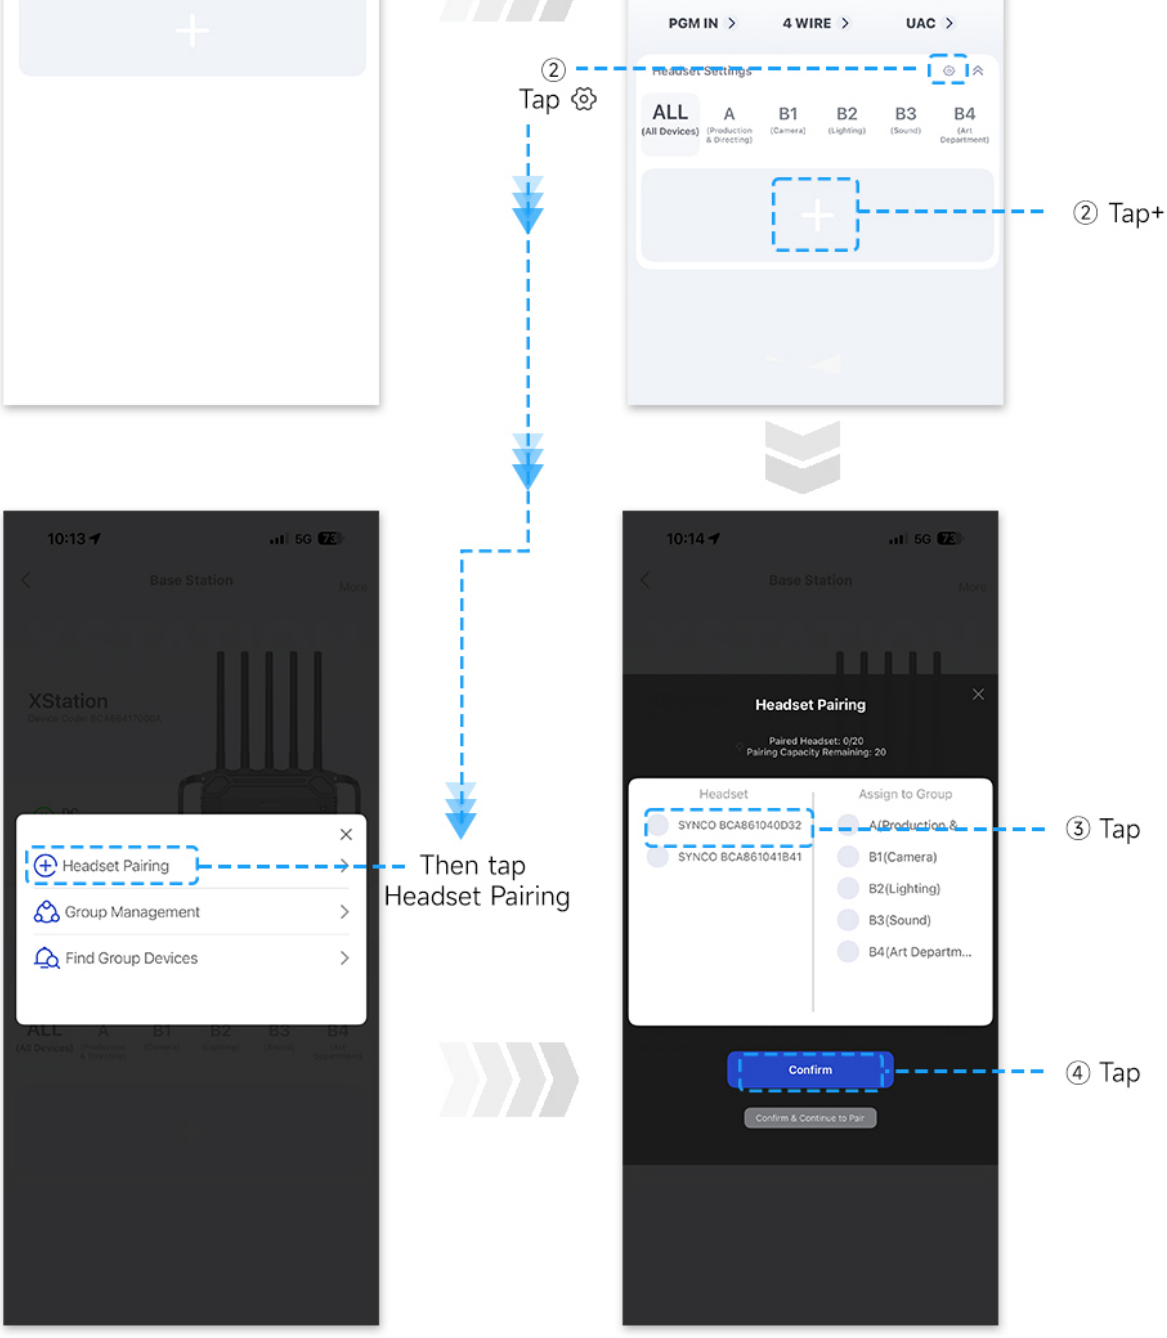
PGM IN
4 WIRE
UAC
ALL
A
B1
B2
B3
B4
Headset Pairing
Group Management
Find Group Devices
Headset Pairing
Headset
Assign to Group
SYNCO BCA861040002
SYNCO BCA861041841
A(Production &...
B1(Camera)
B2(Lighting)
B3(Sound)
B4(Art Departm...
Confirm

② Tap ⚙

② Tap+

Then tap Headset Pairing

③ Tap

④ Tap

2.2 Grouping Required

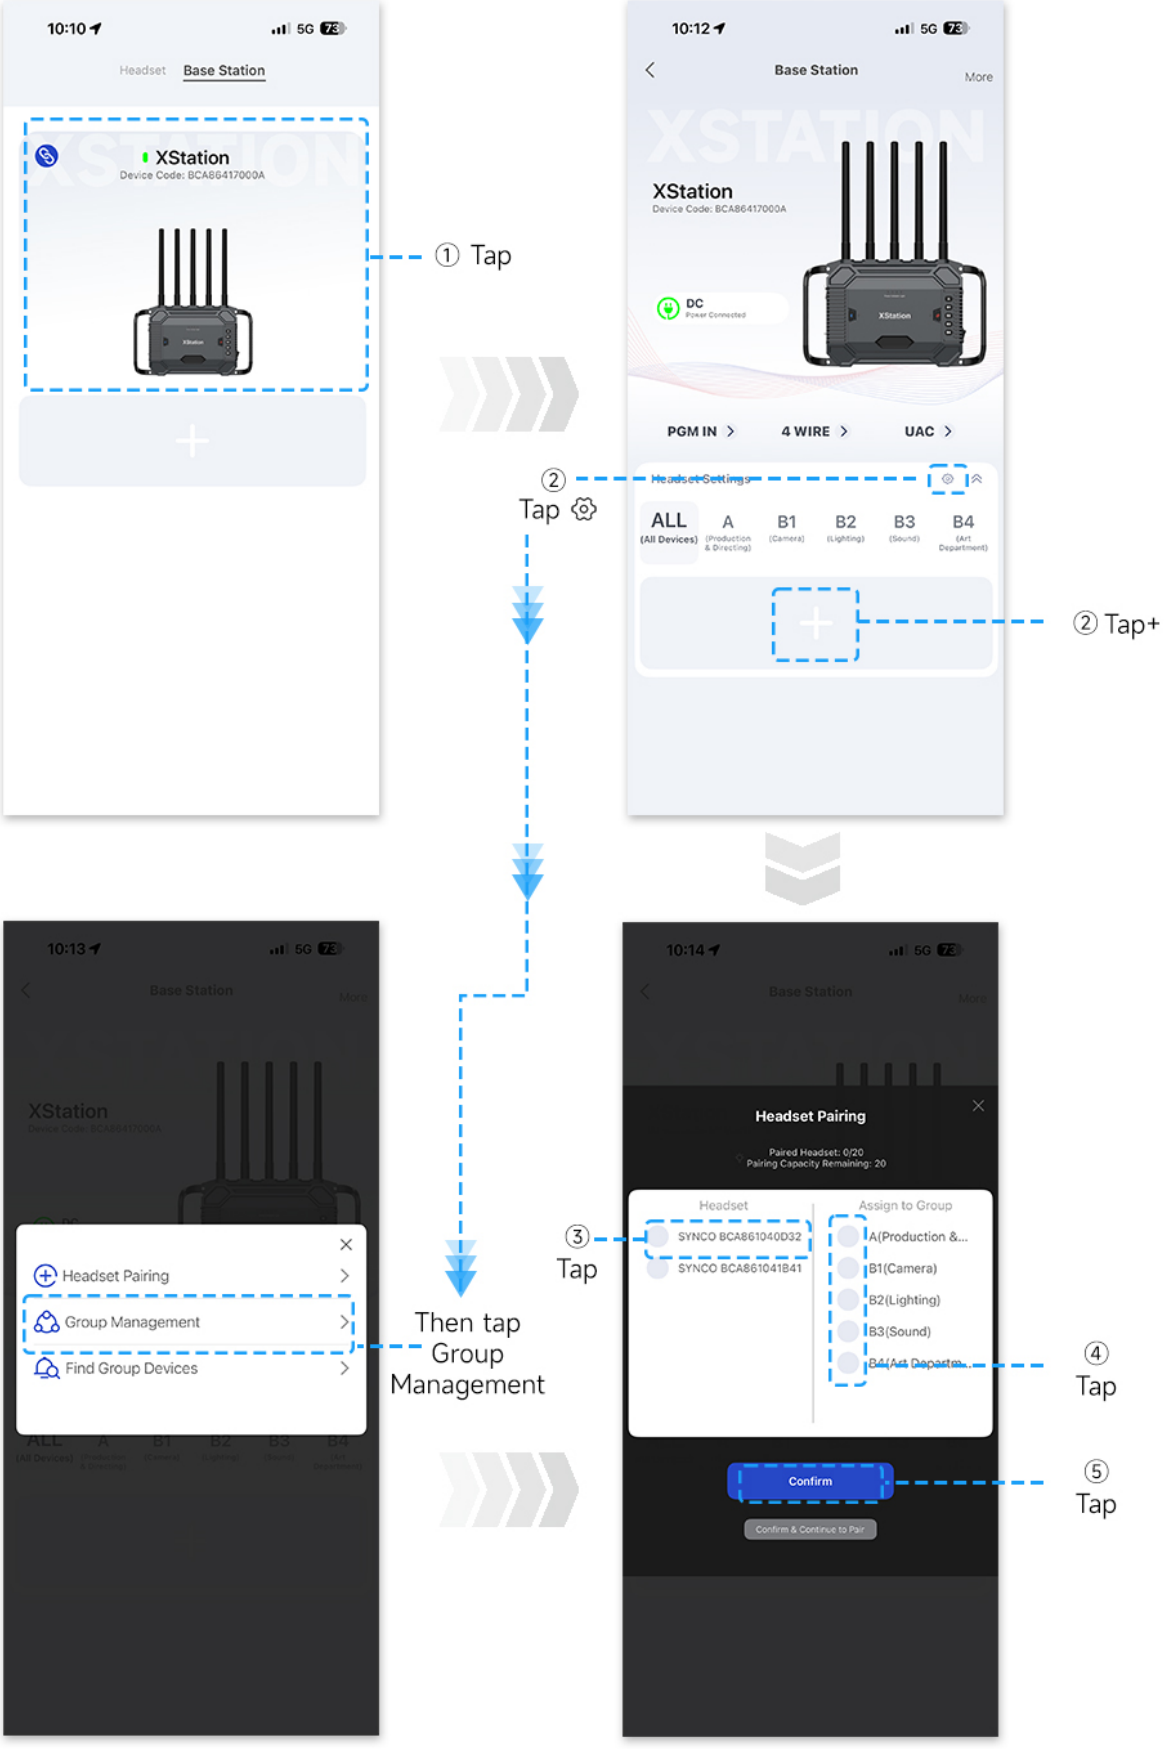
Headset
Base Station
XStation
Base Station
More
PGM IN
4 WIRE
UAC
ALL
A
B1
B2
B3
B4
Headset Pairing
Group Management
Find Group Devices
Headset Pairing
Headset
Assign to Group
SYNCO BCA861040002
SYNCO BCA861041841
A(Production &...
B1(Camera)
B2(Lighting)
B3(Sound)
B4(Art Departm...
Confirm

① Tap

② Tap ⚙

② Tap+

③ Tap

Then tap Group Management

④ Tap

⑤ Tap

2.3 Remove the Headset

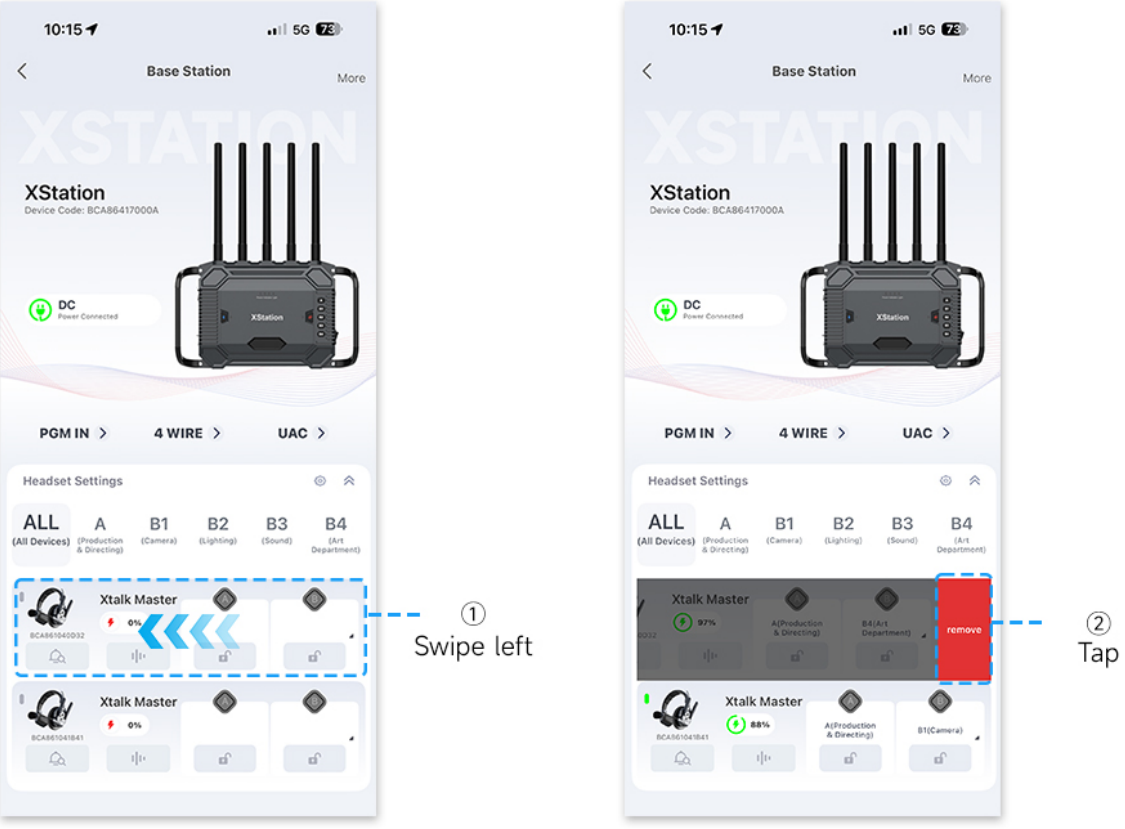
Base Station
More
XStation
DC
PGM IN
4 WIRE
UAC
Headset Settings
ALL
A
B1
B2
B3
B4
Xtalk Master
Xtalk Master

① Swipe left

② Tap

3.Channel Selection

3.1 Auto Channel Selection

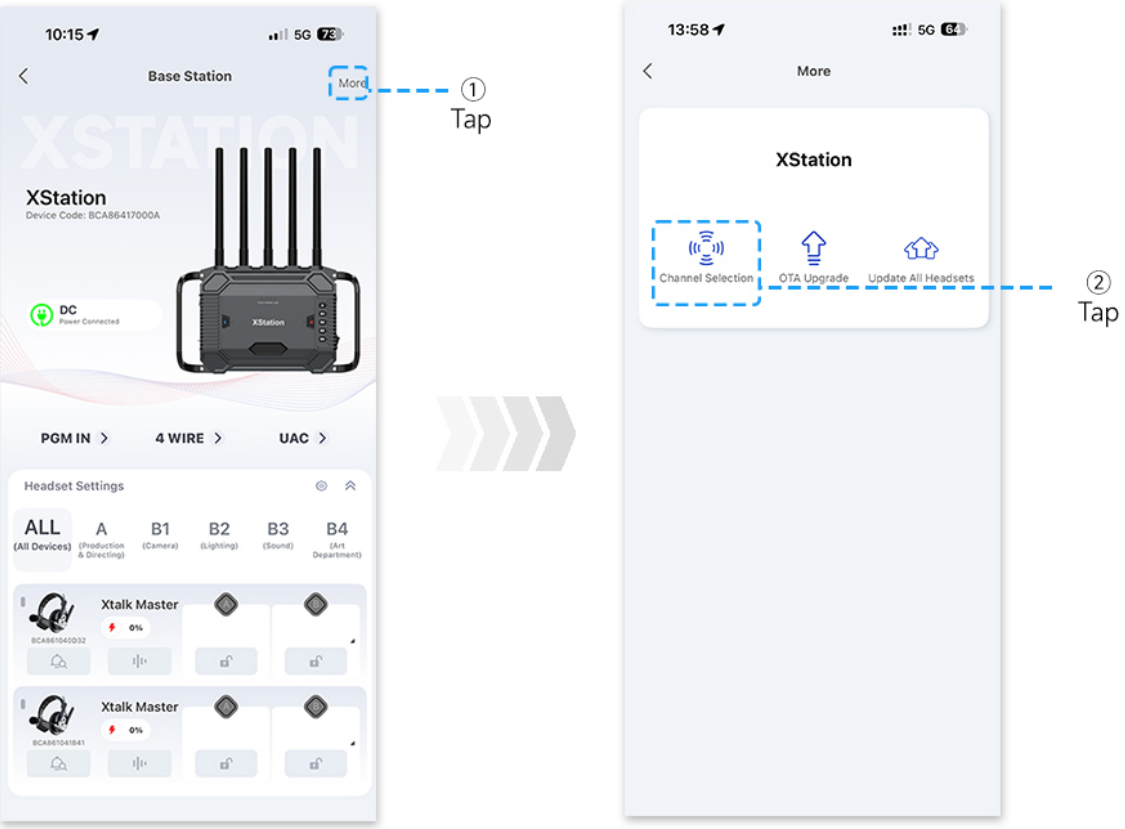
Base Station
More
XStation
DC
PGM IN
4 WIRE
UAC
Headset Settings
ALL
A
B1
B2
B3
B4
Xtalk Master
Xtalk Master
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets

① Tap

② Tap

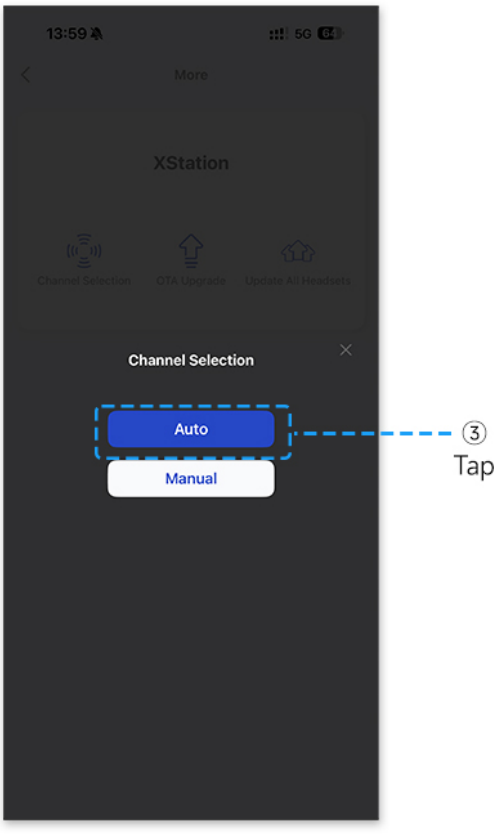
13:59
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets
Channel Selection
Auto
Manual
③
Tap

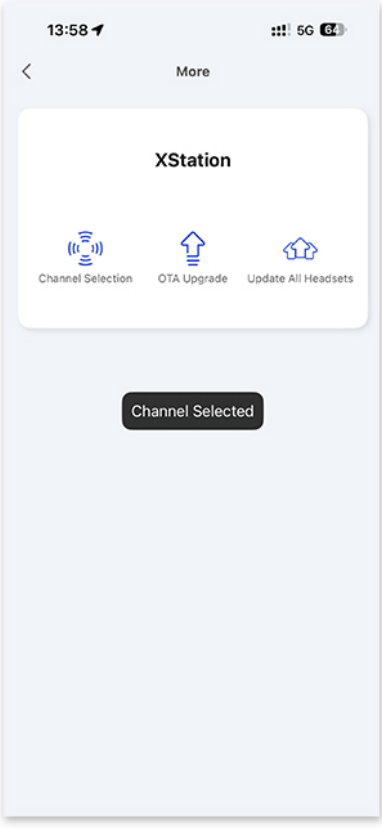
13:58
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets
Channel Selected

3.2 Manual Channel Selection

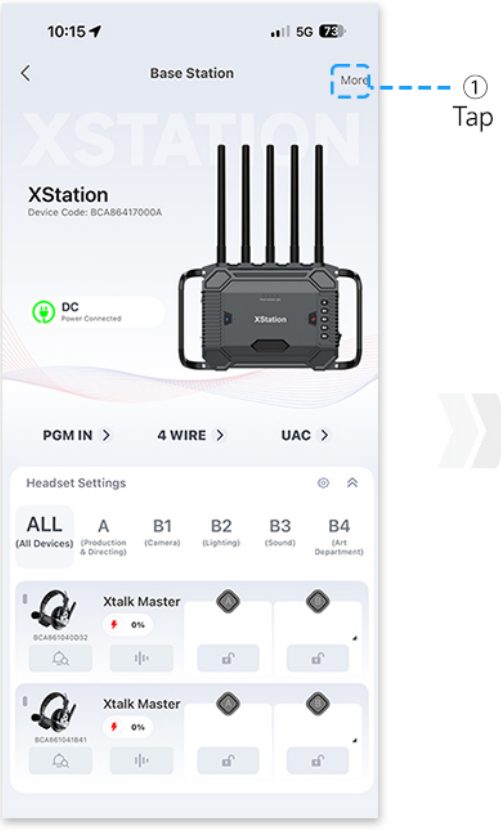
10:15
Base Station
More
XSTATION
XStation
Device Code: BCA86417000A
DC
Power Connected
PGM IN
4 WIRE
UAC
Headset Settings
ALL
(All Devices)
A
(Production & Directing)
B1
(Camera)
B2
(Lighting)
B3
(Sound)
B4
(Art Department)
Xtalk Master
0%
Xtalk Master
0%
①
Tap

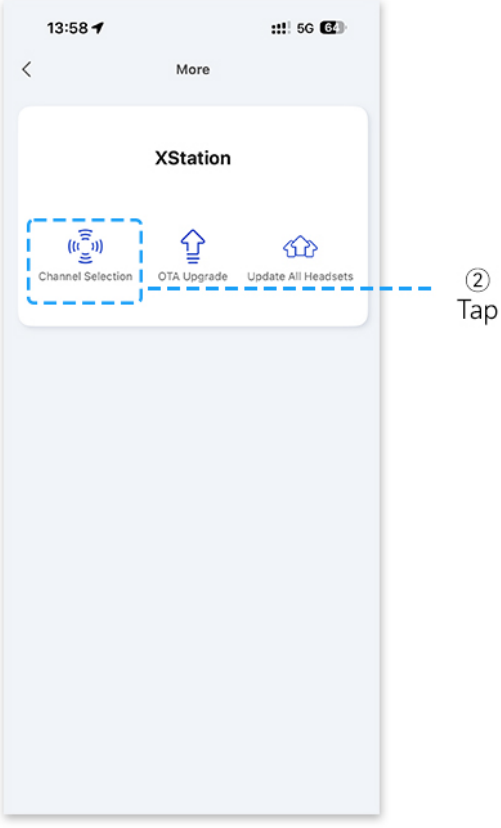
13:58
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets
②
Tap

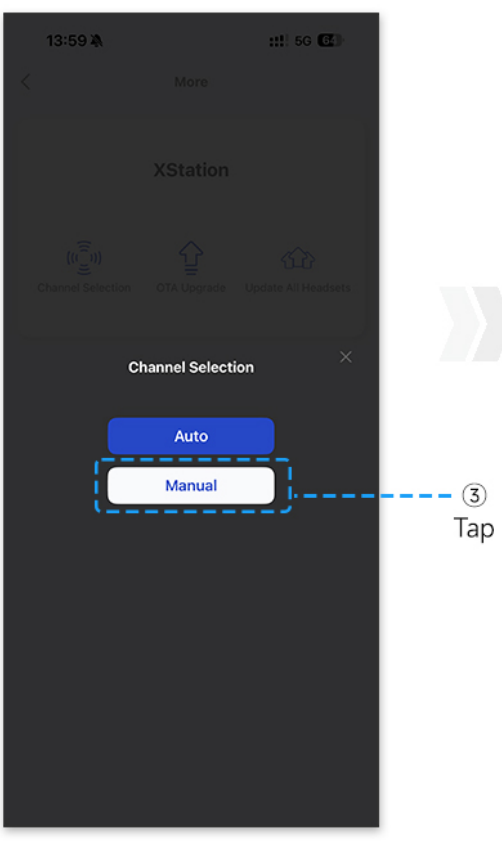
13:59
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets
Channel Selection
Auto
Manual
③
Tap

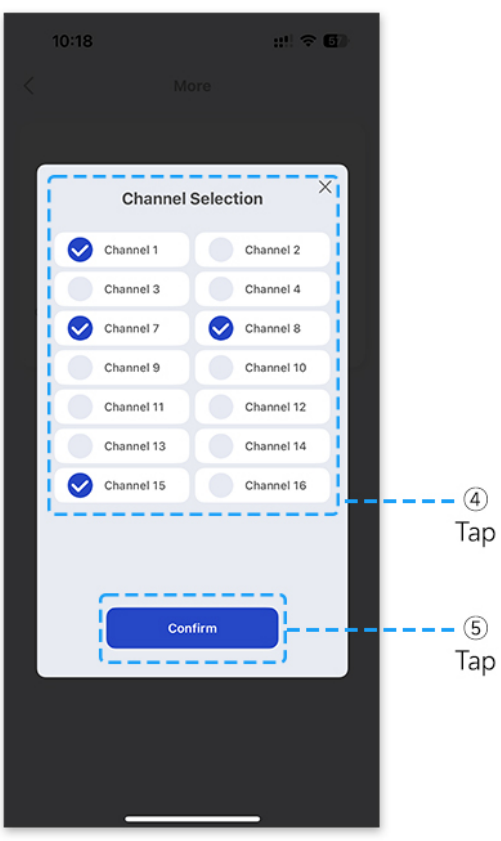
10:18
More
Channel Selection
Channel 1
Channel 2
Channel 3
Channel 4
Channel 7
Channel 8
Channel 9
Channel 10
Channel 11
Channel 12
Channel 13
Channel 14
Channel 15
Channel 16
④
Tap
Confirm
⑤
Tap

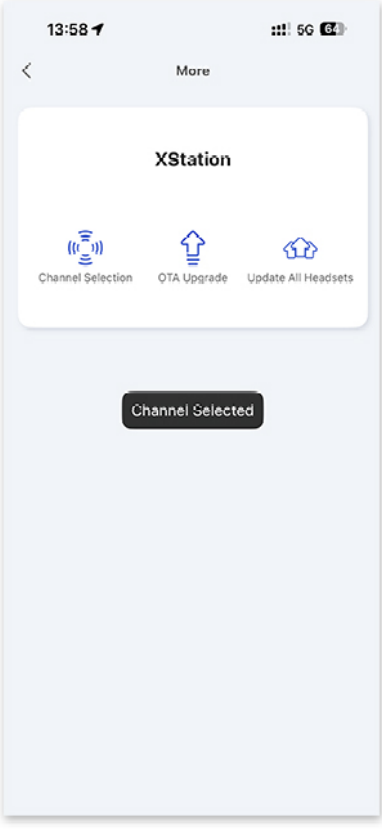
13:58
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets
Channel Selected

4.Group Management

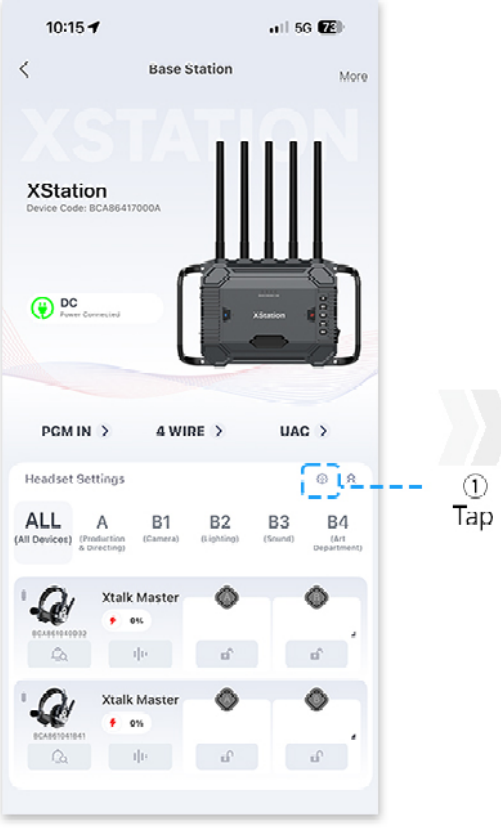
10:15
Base Station
More
XSTATION
XStation
Device Code: BCA86417000A
DC
Power Connected
PGM IN
4 WIRE
UAC
Headset Settings
ALL
(All Devices)
A
(Production & Directing)
B1
(Camera)
B2
(Lighting)
B3
(Sound)
B4
(Art Department)
Xtalk Master
0%
Xtalk Master
0%
①
Tap

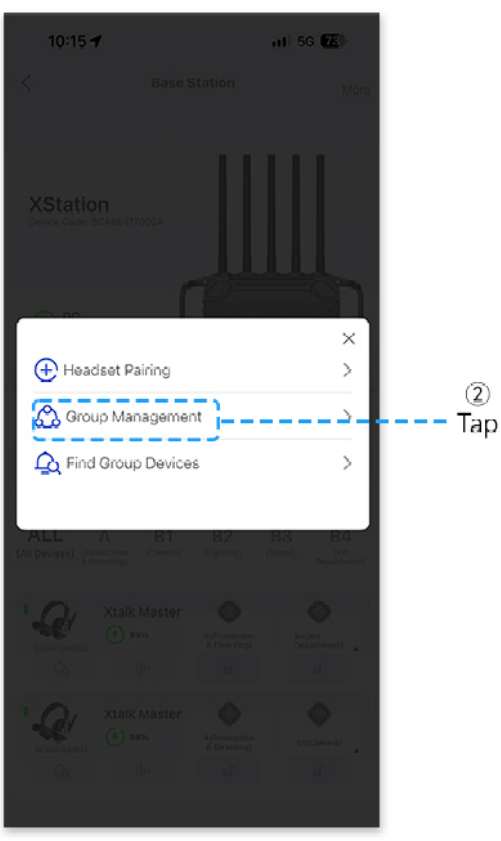
10:15
Base Station
More
Headset Pairing
Group Management
Find Group Devices
②
Tap

E.g., Add a headset to Group B1

E.g., Remove a headset from Group B1

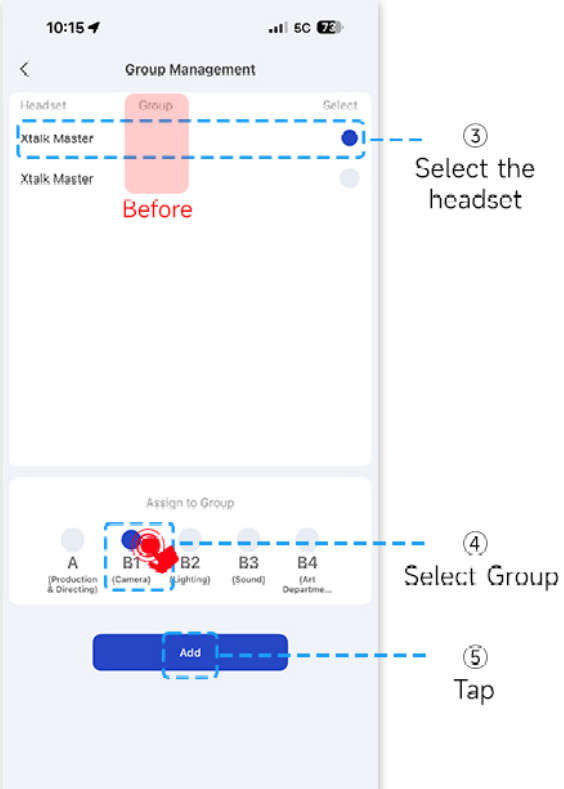
10:15
Group Management
Headset
Group
Select
Xtalk Master
Xtalk Master
Before
③
Select the headset
Assign to Group
A
(Production & Directing)
B1
(Camera)
B2
(Lighting)
B3
(Sound)
B4
(Art Departme...
④
Select Group
Add
⑤
Tap

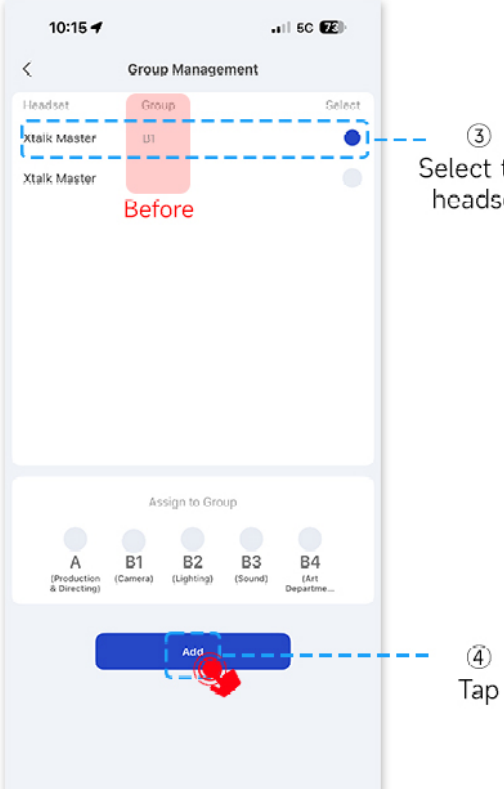
10:15
Group Management
Headset
Group
Select
Xtalk Master
B1
Xtalk Master
Before
③
Select the headset
Assign to Group
A
(Production & Directing)
B1
(Camera)
B2
(Lighting)
B3
(Sound)
B4
(Art Departme...
Add
④
Tap

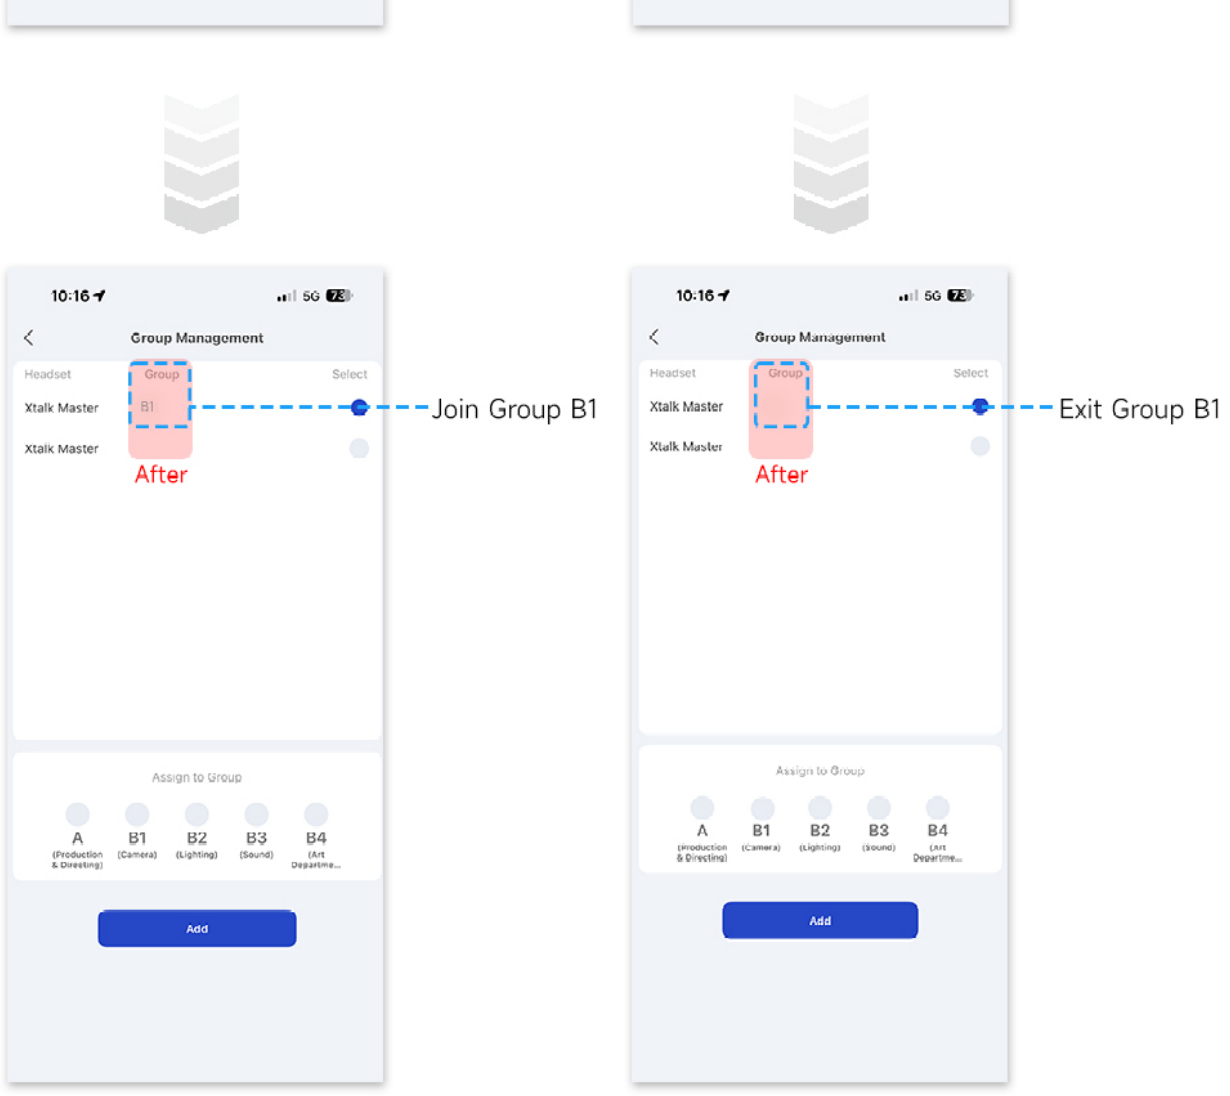
10:16
Group Management
Headset
Group
Select
Xtalk Master
B1
Xtalk Master
After
Join Group B1
Assign to Group
A (Production & Directing)
B1 (Camera)
B2 (Lighting)
B3 (Sound)
B4 (Art Departme...
Add
10:16
Group Management
Headset
Group
Select
Xtalk Master
Xtalk Master
After
Exit Group B1
Assign to Group
A (Production & Directing)
B1 (Camera)
B2 (Lighting)
B3 (Sound)
B4 (Art Departme...
Add

5. Find All Devices in a Group

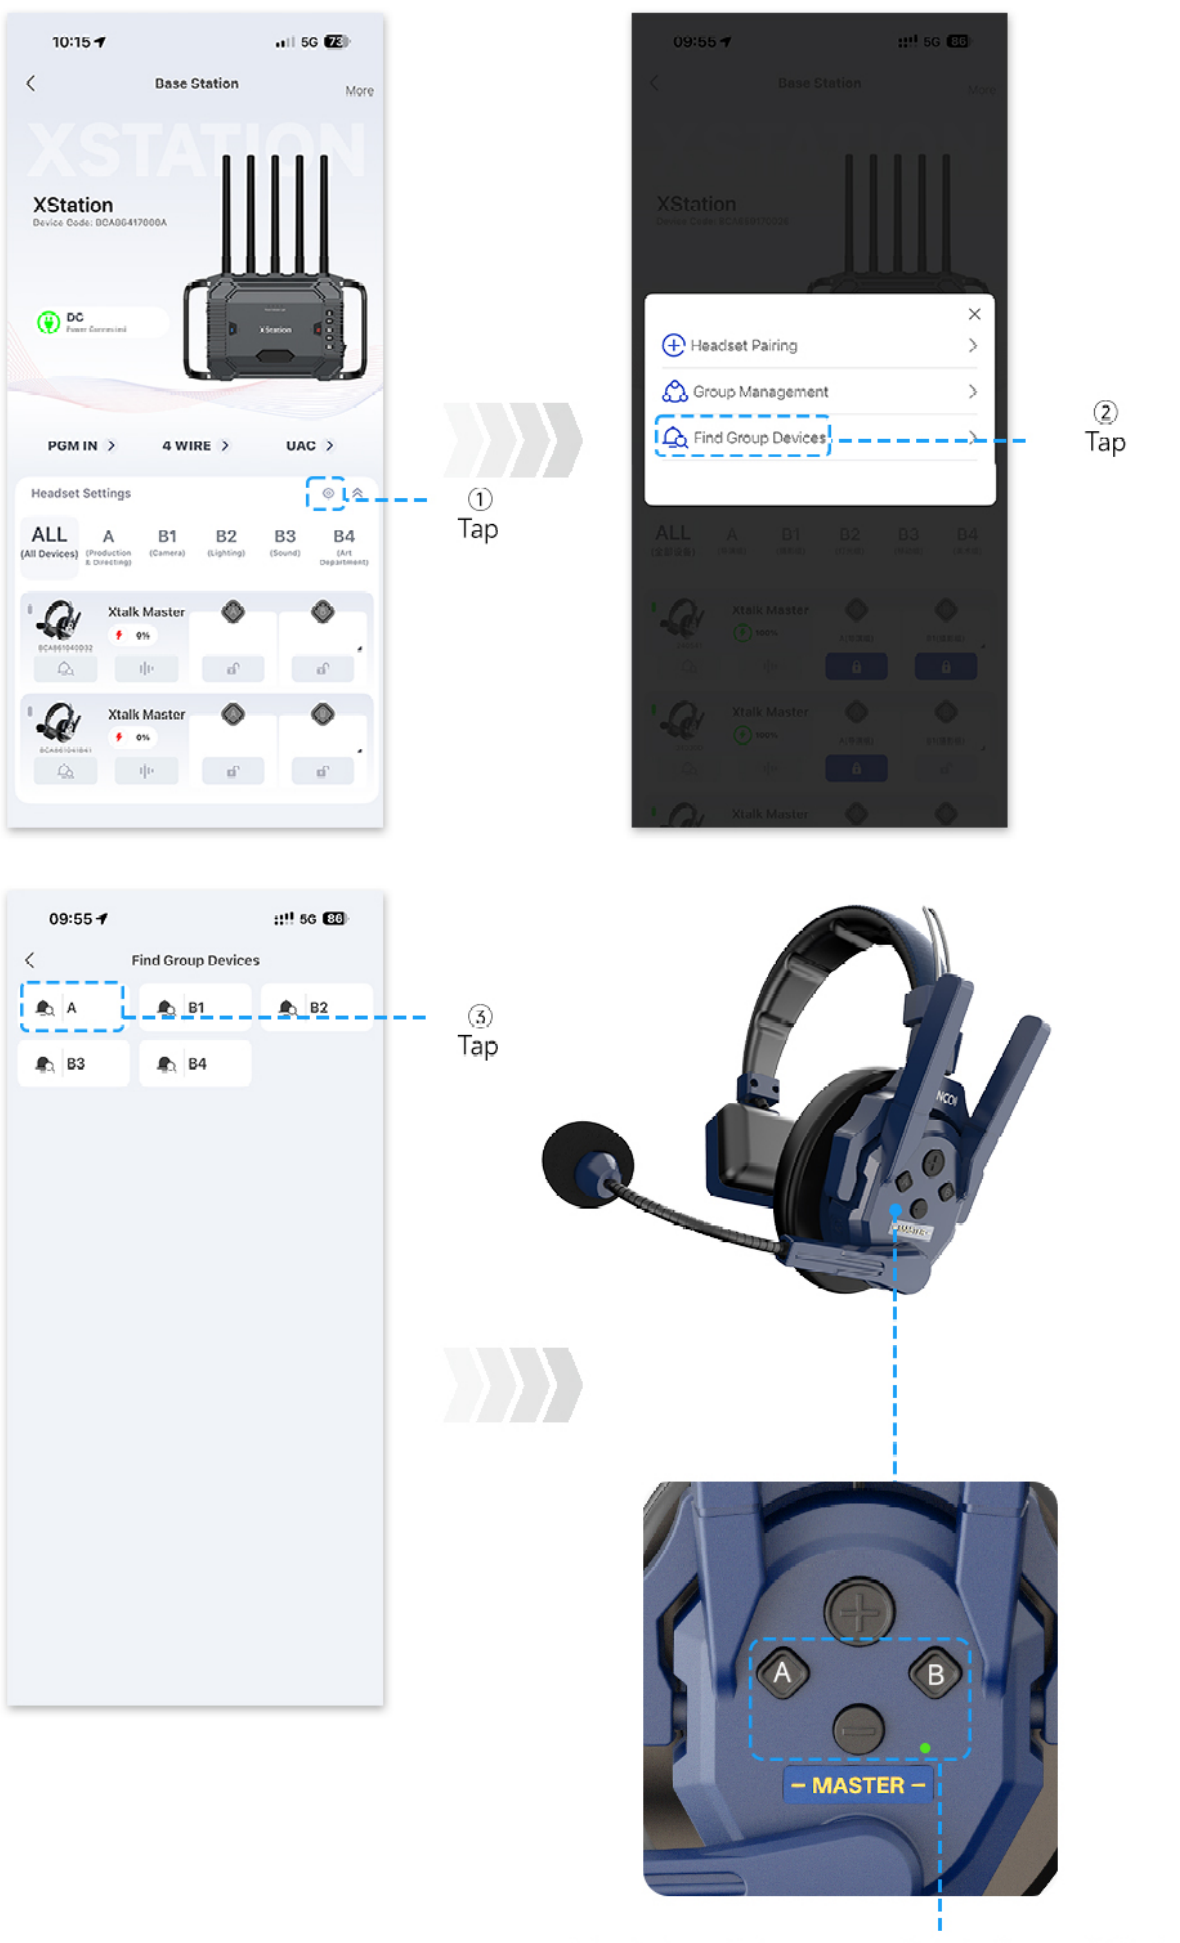
10:15
Base Station
More
XSTATION
XStation
Device Code: BCA86417000A
DC
Power Connected
PGM IN
4 WIRE
UAC
Headset Settings
ALL (All Devices)
A (Production & Directing)
B1 (Camera)
B2 (Lighting)
B3 (Sound)
B4 (Art Department)
Xtalk Master
0%
Xtalk Master
0%
① Tap
09:55
Headset Pairing
Group Management
Find Group Devices
② Tap
09:55
Find Group Devices
A
B1
B2
B3
B4
③ Tap
A
B
MASTER

The device will beep 🔊 and the indicator will flash.

6.Interface Management

6.1 PGM IN Interface Management

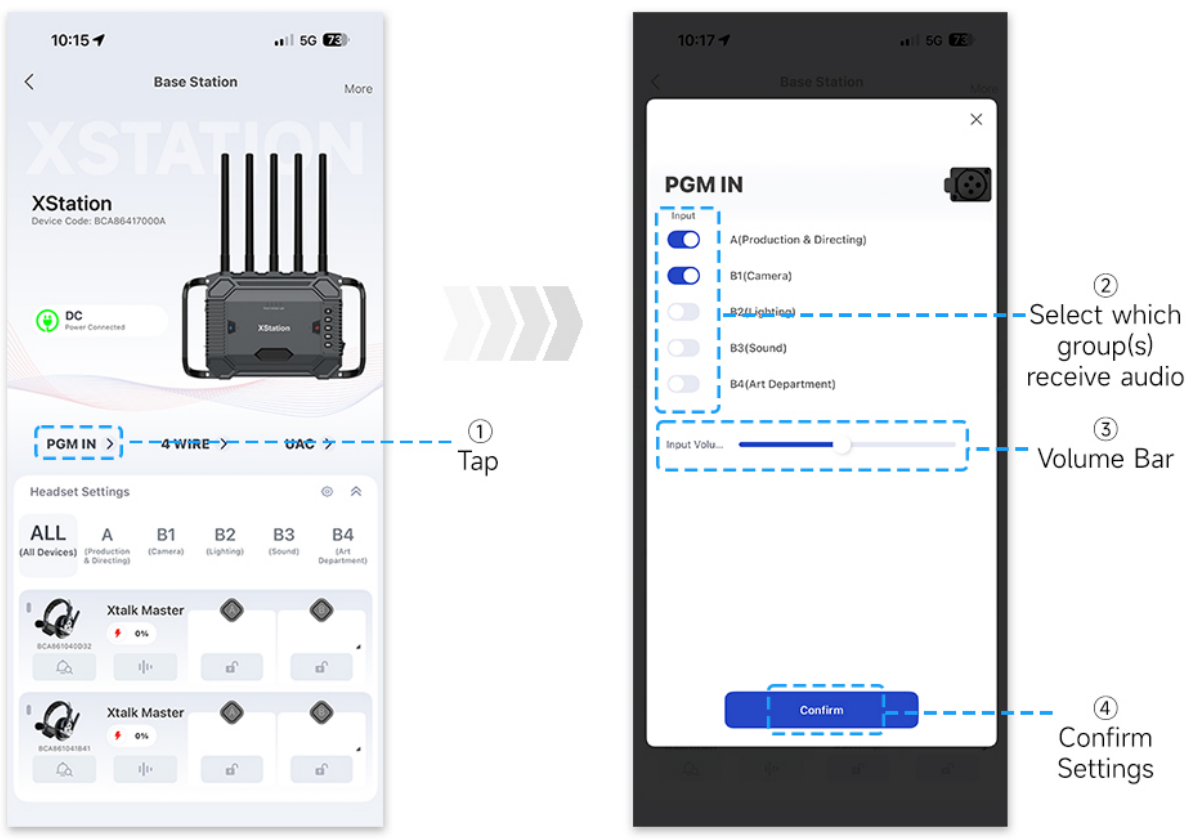
10:15
Base Station
More
XSTATION
XStation
Device Code: BCA86417000A
DC
Power Connected
PGM IN
4 WIRE
UAC
Headset Settings
ALL (All Devices)
A (Production & Directing)
B1 (Camera)
B2 (Lighting)
B3 (Sound)
B4 (Art Department)
Xtalk Master
0%
Xtalk Master
0%
① Tap
10:17
PGM IN
② Select which group(s) receive audio
③ Volume Bar
Confirm
④ Confirm Settings

Input
- ☑ A(Production & Directing)
- ☑ B1(Camera)
- ☐ B2(Lighting)
- ☐ B3(Sound)
- ☐ B4(Art Department)

Input Volu...

6.2 4 Wire Interface Management

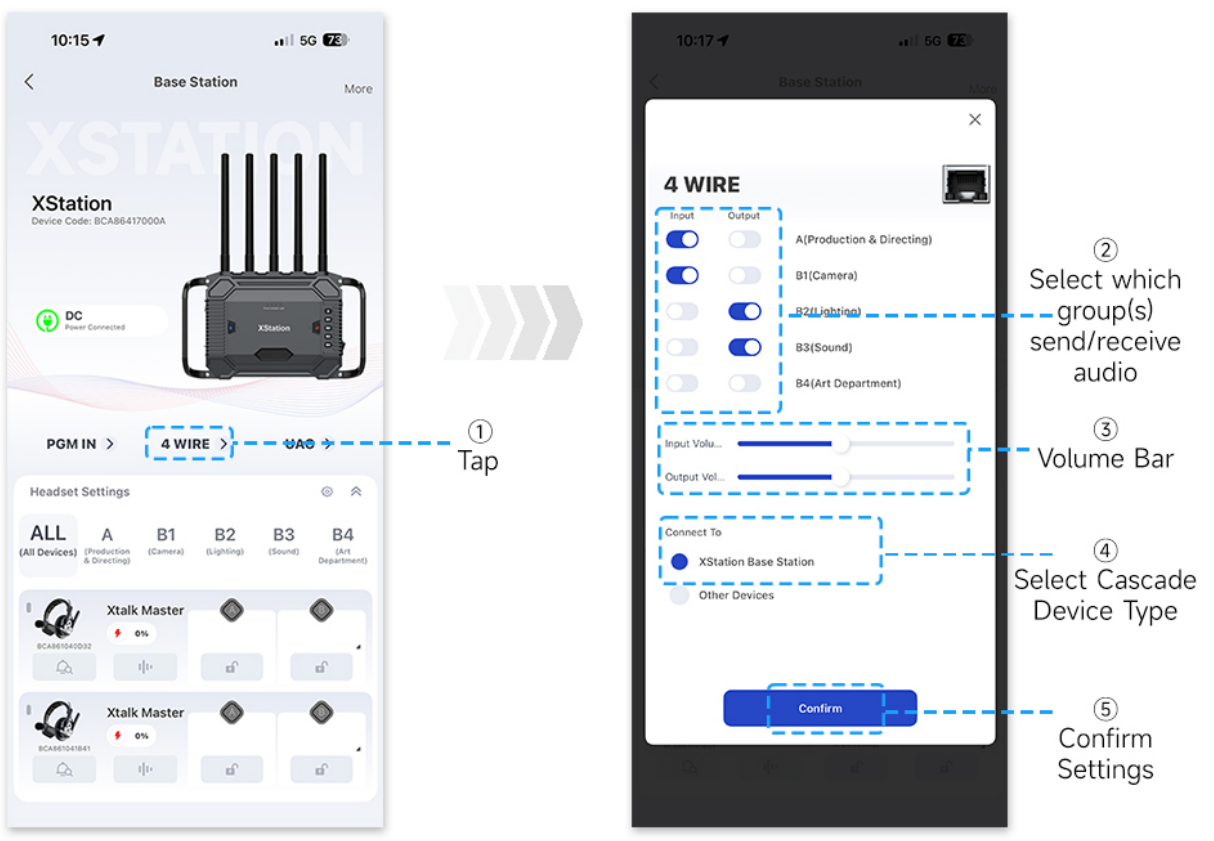
10:15
Base Station
More
XSTATION
XStation
Device Code: BCA86417000A
DC
Power Connected
PGM IN
4 WIRE
UAC
Headset Settings
ALL (All Devices)
A (Production & Directing)
B1 (Camera)
B2 (Lighting)
B3 (Sound)
B4 (Art Department)
Xtalk Master
0%
Xtalk Master
0%
① Tap
10:17
4 WIRE
② Select which group(s) send/receive audio
③ Volume Bar
④ Select Cascade Device Type
Confirm
⑤ Confirm Settings

Input	Output	
☑	☐	A(Production & Directing)
☑	☐	B1(Camera)
☐	☑	B2(Lighting)
☐	☑	B3(Sound)
☐	☐	B4(Art Department)

Input Volu...

Output Vol...

Connect To
- ● XStation Base Station
- ○ Other Devices

6.3 UAC Interface Management

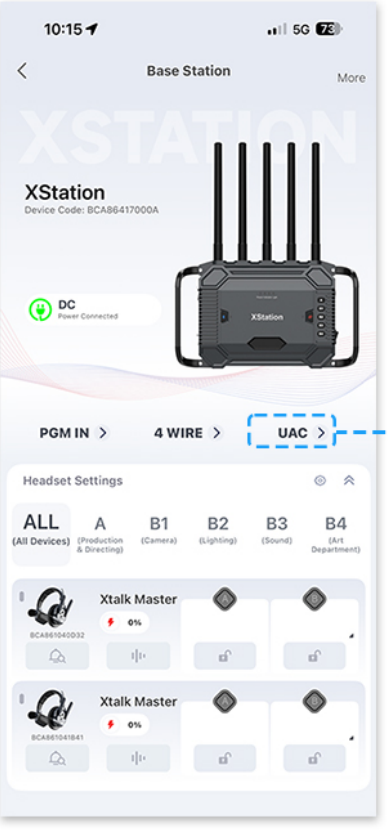
Base Station
More
XStation
PGM IN
4 WIRE
UAC
Headset Settings
ALL
A
B1
B2
B3
B4
Xtalk Master

① Tap

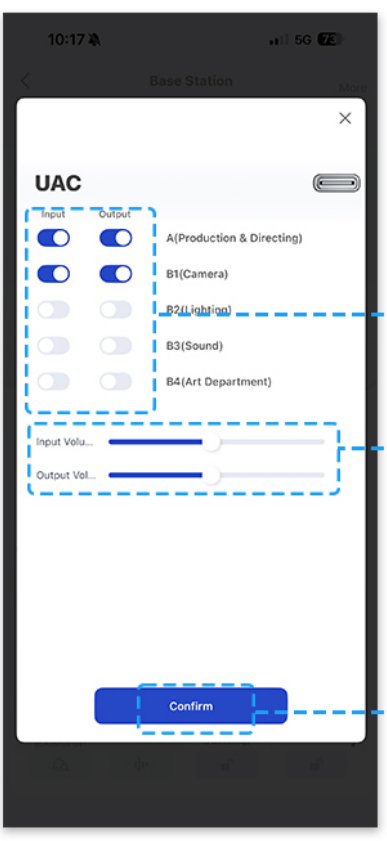
UAC
Input
Output
A(Production & Directing)
B1(Camera)
B2(Lighting)
B3(Sound)
B4(Art Department)
Input Volu...
Output Vol...
Confirm

② Select which group(s) send/receive audio

③ Volume Bar

④ Confirm Settings

7.OTA Updates

7.1 Update XStation

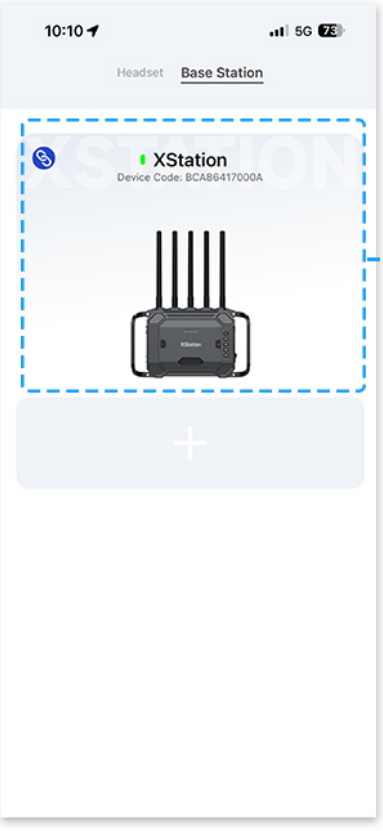
Headset
Base Station
XStation

① Tap

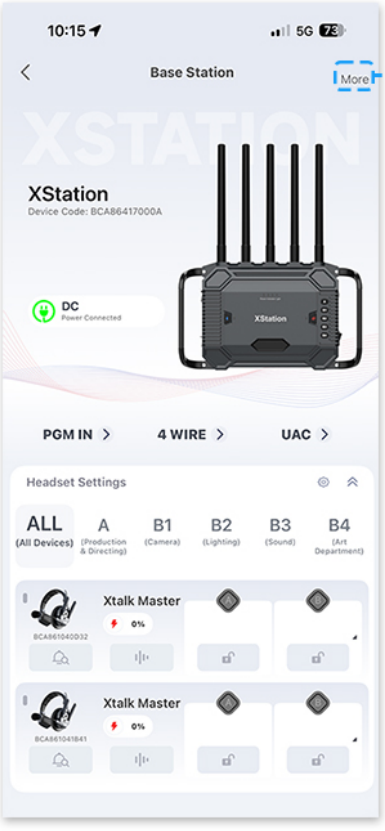
Base Station
More
XStation
PGM IN
4 WIRE
UAC
Headset Settings
ALL
A
B1
B2
B3
B4
Xtalk Master

② Tap

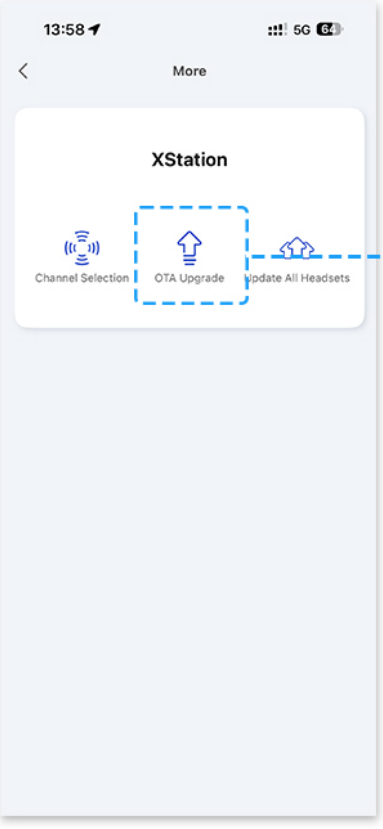
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets

③ Tap

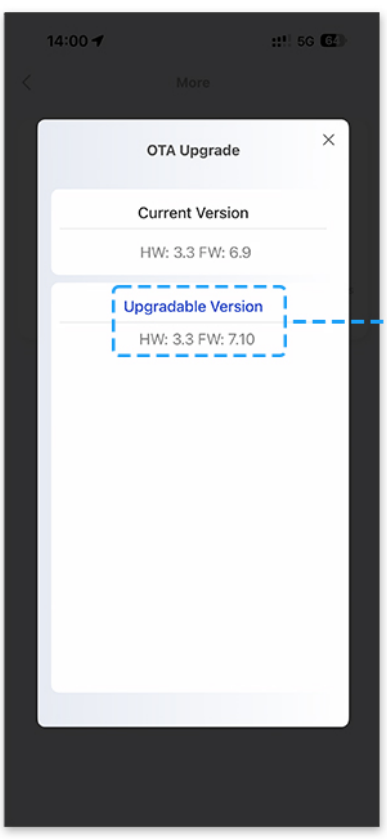
OTA Upgrade

Current Version

HW: 3.3 FW: 6.9

Upgradable Version

HW: 3.3 FW: 7.10

④ Tap

7.2 Update all Headsets

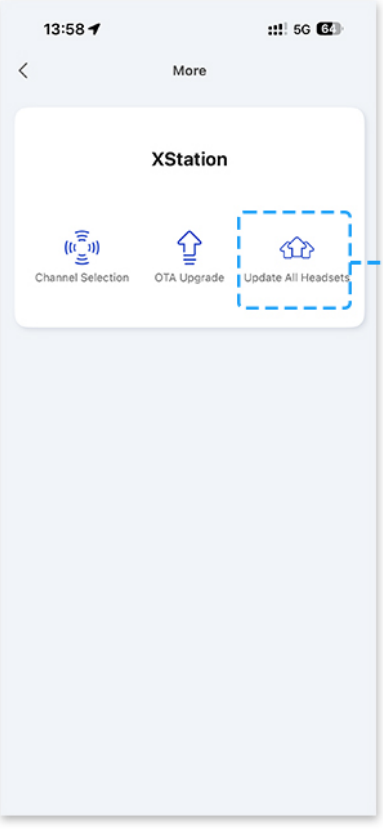
More
XStation
Channel Selection
OTA Upgrade
Update All Headsets

① Tap

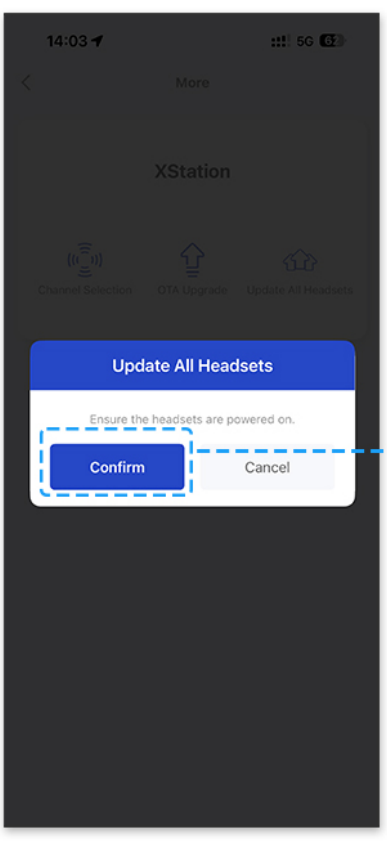
Update All Headsets

Ensure the headsets are powered on.

Confirm
Cancel

② Tap

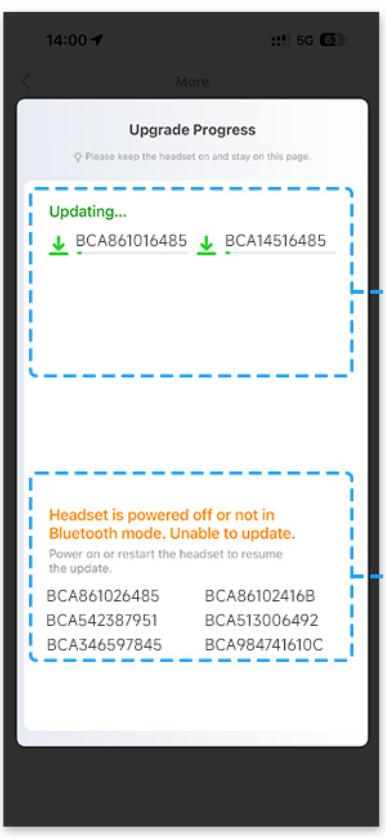
Upgrade Progress

Please keep the headset on and stay on this page.

Updating...

BCA861016485 BCA14516485

Headset is powered off or not in Bluetooth mode. Unable to update.

Power on or restart the headset to resume the update.

BCA861026485 BCA86102416B
BCA542387951 BCA513006492
BCA346597845 BCA984741610C

③ Updating...

④ Update Failed

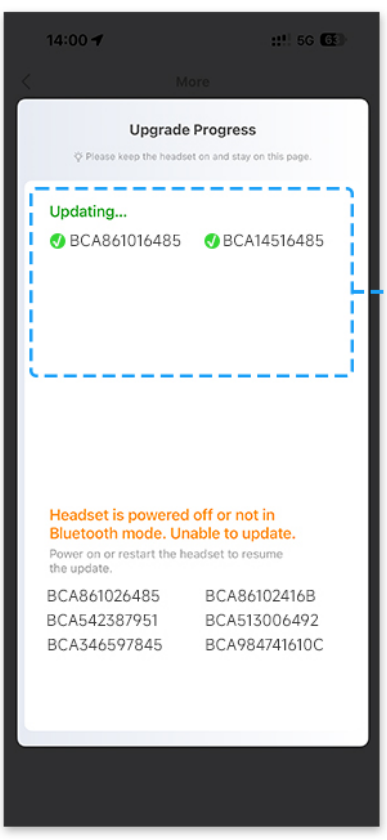
Upgrade Progress

Please keep the headset on and stay on this page.

Updating...

BCA861016485 BCA14516485

Headset is powered off or not in Bluetooth mode. Unable to update.

Power on or restart the headset to resume the update.

BCA861026485 BCA86102416B
BCA542387951 BCA513006492
BCA346597845 BCA984741610C

⑤ Update Complete